

# PLAIN TILE SERIES




Flatline Acoustic Panel Collection is an ideal solution for commercial and educational areas. The Collection promotes personalised and acoustically balanced workspaces without interruption to a collaborative environment. Products can be adjusted and moved to suit the dynamic requirement of a fast-paced modern office. This collection offers acoustic wall panels, ceiling panels, and alternative acoustical solutions.

## SPECIFICATION

- Composition: 100 % polyester (recycled PET appx. 50 %)
- Material Weight: 1300g /m<sup>2</sup> (+/- 5 %)
- Material Thickness: 6mm Natural & Mandarin colors (+/- 10 %)
- Panel Weight: 500 x500mm Natural: kg / per pcs. (+/- 5%)  
Mandarin: kg / per pcs. (+/- 5%)  
600x600mm Natural: 0,88 kg / per pcs. (+/- 5%)  
Mandarin: 1,00 / per pcs. (+/- 5%)

## DIMENSIONS (MM):

| FL600    | FL610    | FL620    | FL630    |
|----------|----------|----------|----------|
| L: 500mm | L: 500mm | L: 600mm | L: 600mm |
| H: 500mm | H: 500mm | H: 600mm | H: 600mm |
| W: 30mm  | W: 40mm  | W: 30mm  | W: 40mm  |

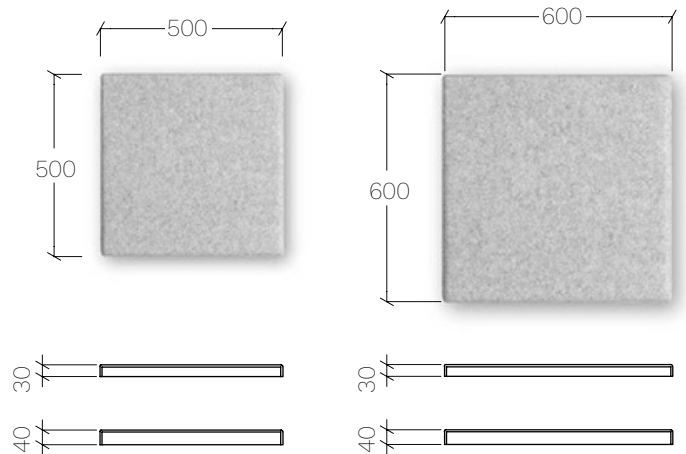

## PERFORMANCE

- Acoustic Rates: 6mm Natural: NRC (EN-11654)  
6mm Mandarin: 0.25 NRC (EN-11654)  
6mm Natural + Feltfill: NRC (EN-11654)  
6mm Mandarin + Feltfill: 0.95 NRC (EN-11654)  
12mm Natural: 0.40 NRC (EN-11654)  
12mm Mandarin: NRC (EN-11654)  
12mm Natural + Feltfill: 1.00 NRC (EN-11654)  
12mm Mandarin + Feltfill: NRC (EN-11654)
- Fire Rates: B, S1, d0 (EN-13501)
- Light fastness: 6+ (ISO-105 B02)
- Health : 99.9 % Antibacterial (ISO-20743)
- Formaldehyde-free (ISO-14184)
- Moisture Absorption: >0.03 % by weight (50°C/122°F at 90% relative humidity)
- Thermal insulating: 0,040 W/mK
- Abrasion: EN ISO 12947 / Performance 'A'



## KEY FEATURES & BENEFITS

- Available in 7 Natural colours & 33 Mandarin colours.
- Highly durable providing long-term stability and performance.
- Safe, non-toxic, non-irritant & without red list chemical binders.
- Recycled and recyclable.

## CARE

- Easy to clean with a damp cloth or vacuum cleaner.
- Indoor use only.

## INSTALLATION

- Prior to installation, walls and surfaces must be clean, dust-free and void of any defects or imperfections. Contact-type adhesive for applying plate on surfaces such as plasterboard, concrete, block, plywood, MDF and particleboard. NGA recommends Pattex PL600 & Liquid Nails LN-2000 or equivalent adhesive with a glue gun.

