

CONTOUR

3D WALL TILE SERIES

NGA

Our standard 597mm X 597mm tiles can be arranged and configured uniformly in a single direction, vertically or horizontally, in alternating directions or totally random to create expressive visual interest to your space.

Designed with parametric blades configured to form 3 dimensional organic shapes, sound is trapped, deflected and diffused between the individual blades maximising acoustic performance and enhancing visual impact.

SPECIFICATION

- Composition: 100 % polyester (recycled PET appx. 50 %)
- Material Weight: 12mm: 2600g/m² (+/- 5%)
- Material Thickness: 12mm (+/- 10 %)

PERFORMANCE

- Acoustic NRC Rating: E87 NRC 0.75 (12mm material)
- Fire Rates: B, S1, d0 (EN-13501 - 1:2018)
- Light fastness: 6+ (ISO-105 B02)
- Health : 99.9 % Antibacterial (ISO-20743)
- Formaldehyde-free (ISO-14184)
- Moisture Absorption: >0.03 % by weight (50°C/122°F at 90% relative humidity)
- Thermal insulating: 0,040 W/mK
- Abrasion: EN ISO 12947 / Performance 'A'

KEY FEATURES & BENEFITS

- Available in 19 colours.
- Highly durable providing long-term stability and performance.
- Safe, non-toxic, non-irritant & without red list chemical binders.
- Recycled and recyclable.


CARE

- Easy to clean with a damp cloth or vacuum cleaner.
- Indoor use only.

INSTALLATION

- Prior to installation, walls and surfaces must be clean, dust-free and void of any defects or imperfections. Contact-type adhesive for applying plate on surfaces such as plasterboard, concrete, block, plywood, MDF and particleboard. NGA recommends Pattex PL600 & Liquid Nails LN-2000 or equivalent adhesive with a glue gun.

DIMENSIONS (MM):

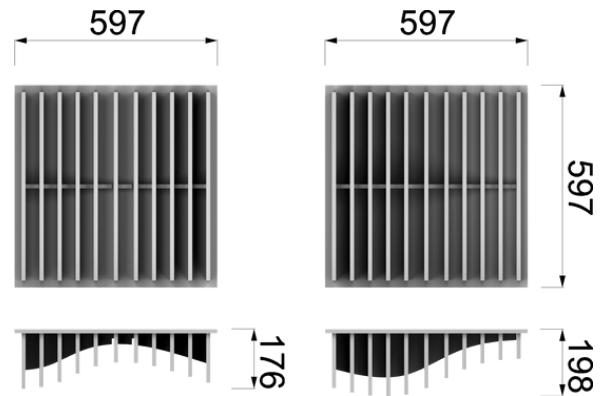

NB: Contour is made up of two differently configured tiles (Type A and Type B) to form one 1194mm x 597mm Contour tile as depicted in the photos.

