PRODUCT DESCRIPTION

Fusion Flex 19.2w per metre LED strip.

PRODUCT NOTES

Fusion Flex LED strip is supplied in 5m reels with a 1m tail at each end as standard. NGA recommends all LED strip is used in conjunction with appropriate aluminium heat sink for heat dissipation. For a homogenous appearance, please select aluminium profile with a depth greater than the LED pitch. Custom cut LED fixtures are available upon request.
















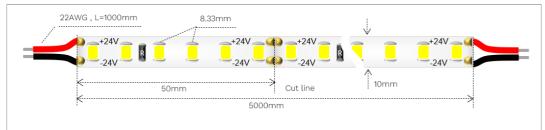

TECHNICAL INFORMATION

Product Code	NGA/LL/SP/1/120/19.2/3000/20
Troduct code	14077 120713.273000720
Product Group	LED Strip
Power Consumption	19.2w/m
Supply Voltage	DC24V
LEDs per metre	120
Cutting Interval	50mm
LED Pitch	8.33mm
Cable Gauge	22 AWG

Height	1.7mm		
Туре	Constant Voltage		
Efficacy	101lm/w (@ 3000k)		
IP Rating Options	IP20 / IP65 / IP66 / IP67 / IP68		
CRI	Ra≥90		
MacAdam Step	2SDCM		
Control Gear	On/Off / Mains / 0-10 / DALI / DMX		
Lifetime	50.000 hours at L80		

12.5mm

Colour Temperature	2400k	2700k	3000k	4000k	6000k
Lumen Output	1824lm	1880lm	1940lm	2000lm	2052lm
IP Rating	IP20	IP65	IP66	IP67	IP68

10mm

HEAD OFFICE

Width

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

10mm



12.5mm