FUSION FLEX 4.8W/M

NGA/LL/SP/1/120/4.8/XXXX/IP

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Fusion Flex 4.8w per metre LED strip.


PRODUCT NOTES

Fusion Flex LED strip is supplied in 5m reels with a 1m tail at each end as standard. NGA recommends all LED strip is used in conjunction with appropriate aluminium heat sink for heat dissipation. For a homogenous appearance, please select aluminium profile with a depth greater than the LED pitch. Custom cut LED fixtures are available upon request.

PRODUCT CODE BUILDER

Please specify the appropriate colour temperature and IP rating with your enquiry. **E.g., NGA/LL/SP/1/120/4.8/3000/20**



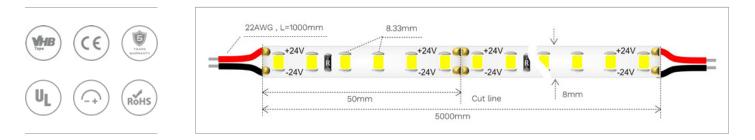

TECHNICAL INFORMATION

		-		
Product Code	NGA/LL/SP/1/120/4.8/XXXX/IP		Height	1.7mm
Product Group	LED Strip		Туре	Constant Voltage
Power Consumption	4.8w/m		Efficacy	101lm/w (@ 3000k)
Supply Voltage	DC24V		IP Rating Options	IP20 / IP65 / IP66 / IP67 / IP68
LEDs per metre	120		CRI	Ra≥90
Cutting Interval	50mm		MacAdam Step	2SDCM
LED Pitch	8.33mm		Control Gear	On/Off / Mains / 0-10 / DALI / DMX
Cable Gauge	22 AWG		Lifetime	50.000 hours at L80
Lable Gauge	ZZ AWG			50.000 hours at L80

Colour Temperature	2400k	2700k	3000k	4000k	6000k
Lumen Output	456lm	470lm	485lm	500lm	513lm

IP Rating	IP20	IP65	IP66	IP67	IP68
Width	8mm	-	8mm	10.5mm	10.5mm

