FUSION FLEX 43.2W/M

NGA/LL/HP/3/360/43.2/XXXX/IP

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Fusion Flex 43.2w per metre LED strip.


PRODUCT NOTES

Fusion Flex LED strip is supplied in 5m reels with a 1m tail at each end as standard. NGA recommends all LED strip is used in conjunction with appropriate aluminium heat sink for heat dissipation. For a homogenous appearance, please select aluminium profile with a depth greater than the LED pitch. Custom cut LED fixtures are available upon request.

PRODUCT CODE BUILDER

Please specify the appropriate colour temperature and IP rating with your enquiry. E.g., NGA/LL/HP/3/360/43.2/3000/20



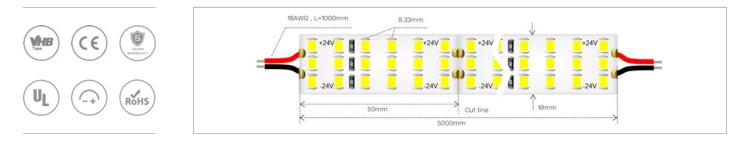

TECHNICAL INFORMATION

Product Code	NGA/LL/HP/3/360/43.2/XXXX/IP
Product Group	LED Strip
Power Consumption	43.2w/m
Supply Voltage	DC24V
LEDs per metre	360
Cutting Interval	50mm
LED Pitch	8.33mm
Cable Gauge	18 AWG

Height	1.3mm
Туре	Constant Voltage
Efficacy	82.8lm/w (@ 3000k)
IP Rating Options	IP20 / IP66
CRI	Ra≥90
MacAdam Step	2SDCM
Control Gear	On/Off / Mains / 0-10 / DALI / DMX
Lifetime	50.000 hours at L80

Colour Temperature	2400k	2700k	3000k	4000k	6000k
Lumen Output	2890lm	3260lm	3580lm	3870lm	4270lm
IP Rating	IP20	IP65	IP66	IP67	IP68

IP Rating	IP20	IP65	IP66	IP67	IP68
Width	19mm	_	19mm	-	-

