FUSION FLEX DIM TO WARM 20W/M

NGA/LL/DTW/1/9696/20/XX-XX/IP

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Fusion Flex Dim to Warm 20w per metre LED strip.

PRODUCT NOTES


Fusion Flex LED strip is supplied in 5m reels with a 1m tail at each end as standard. NGA recommends all LED strip is used in conjunction with appropriate aluminium heat sink for heat dissipation. For a homogenous appearance, please select aluminium profile with a depth greater than the LED pitch. Custom cut LED fixtures are available upon request.

PRODUCT CODE BUILDER

MHE

Please specify colour range and the IP rating with your enquiry. E.g. NGA/LL/DTW/1/9696/9.6/27-18/20



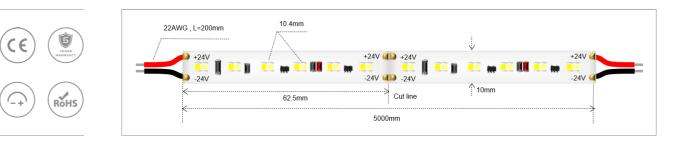

TECHNICAL INFORMATION

	l	Height	1.7mm
ED Strip		Туре	Constant Voltage
)w/m		Efficacy	75lm/w (@ 3000k)
C24V	-	IP Rating Options	IP20 / IP65 / IP66 / IP67 / IP68
6+96		CRI	Ra≥ 90
2.5mm	-	MacAdam Step	2SDCM
).4mm		Control Gear	Mains / 0-10 / DALI / DMX
2 AWG	-	Lifetime	50.000 hours at L80
 C 2.	w/m 24V +96 5mm 4mm	w/m 24V +96 5mm 4mm	w/m Efficacy 24V IP Rating Options +96 CRI 5mm MacAdam Step 4mm Control Gear

Colour Temperature	-	-	3000k	-	-
Lumen Output	_	_	1520lm	_	-

IP Rating	IP20	IP65	IP66	IP67	IP68
Width	10mm	_	10mm	12.5mm	12.5mm



MENA REGION HQ T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

