

FUSION FLEX DYNAMIC WHITE 28.8W/M

NGA/LL/DYN/1/120120/28.8/2165/IP

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Fusion Flex Dynamic White 28.8w per metre LED strip.



PRODUCT NOTES

Fusion Flex LED strip is supplied in 5m reels with a 1m tail at each end as standard. NGA recommends all LED strip is used in conjunction with appropriate aluminium heat sink for heat dissipation. For a homogenous appearance, please select aluminium profile with a depth greater than the LED pitch. Custom cut LED fixtures are available upon request. Standard colour range is 2100k-6500k, custom ranges available upon request.

PRODUCT CODE BUILDER

Please specify IP rating with your enquiry.

E.g., NGA/LL/DYN/1/120120/28.8/2165/68

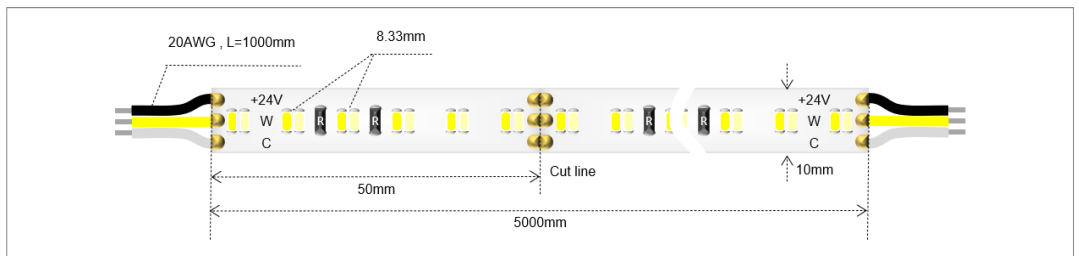

TECHNICAL INFORMATION

Product Code	NGA/LL/DYN/1/120120/28.8/2165/IP
Product Group	LED Strip
Power Consumption	28.8w/m
Supply Voltage	DC24V
LEDs per metre	120+120
Cutting Interval	50mm
LED Pitch	8.33mm
Cable Gauge	20 AWG

Height	1.7mm
Type	Constant Voltage
Efficacy	79.8lm/w (@ 4000k)
IP Rating Options	IP20 / IP65 / IP66 / IP67 / IP68
CRI	Ra ≥ 90
MacAdam Step	2SDCM
Control Gear	0-10 / DALI / DMX
Lifetime	50,000 hours at L80

Colour Temperature	2100k	-	4000k	-	6500k
Lumen Output	-	-	2300lm	-	-

IP Rating	IP20	IP65	IP66	IP67	IP68
Width	10mm	-	10mm	12.5mm	12.5mm

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA