FUSION FLEX RGB 7.2W/M

NGA/LL/RGB/1/30/7.2/20

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Fusion Flex RGB 7.2w per metre LED strip.

PRODUCT NOTES

Fusion Flex LED strip is supplied in 5m reels with a 1m tail at each end as standard. NGA recommends all LED strip is used in conjunction with appropriate aluminium heat sink for heat dissipation. For a homogenous appearance, please select aluminium profile with a depth greater than the LED pitch. Custom cut LED fixtures are available upon request.


PRODUCT CODE BUILDER

Please specify the IP rating with your enquiry.

E.g., NGA/LL/RGB/1/30/7.2/20

VHE



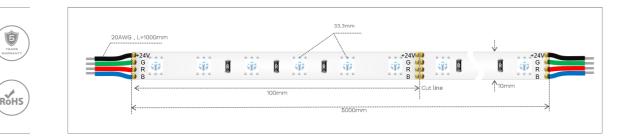

TECHNICAL INFORMATION

Product Code	NGA/LL/RGB/1/30/7.2/20	Height
Product Group	LED Strip	Туре
Power Consumption	7.2w/m	Efficacy
Supply Voltage	DC24V	IP Rating Options
LEDs per metre	30	CRI
Cutting Interval	100mm	MacAdam Step
LED Pitch	33.3mm	Control Gear
Cable Gauge	20 AWG	Lifetime

Height	1.7mm	
Туре	Constant Voltage	
Efficacy	35.8lm/w (@ MAX)	
IP Rating Options	IP20 / IP66 / IP67 / IP68	
CRI	N/A	
MacAdam Step	2SDCM	
Control Gear	0-10 / DALI / DMX	
Lifetime	50.000 hours at L80	

Colour Temperature	RED	GREEN	BLUE	MAX	_
Lumen Output	70lm	155lm	33lm	258lm	_

IP Rating	IP20	IP65	IP66	IP67	IP68
Width	10mm	_	10mm	12.5mm	12.5mm

