

# FUSION NEON 0612H DYN 8W/M IP68

NGA/LL/NF/0612/H/8/DYN/2757/68/EE

LED SPECIFICATION SHEET

## PRODUCT DESCRIPTION

Horizontal Bend 8w IP68 Dynamic White Fusion Neon



## PRODUCT NOTES

Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.

The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request. Standard colour range is 2700k-5700k. Custom ranges available upon request.

## PRODUCT CODE BUILDER

N/A

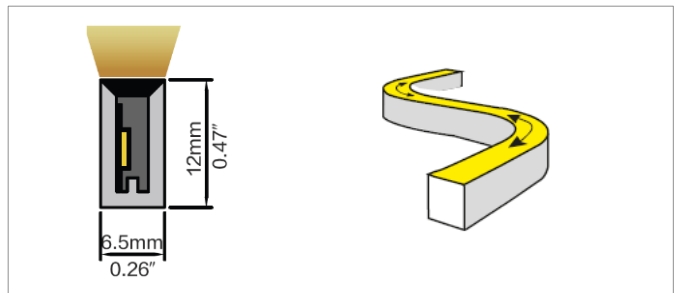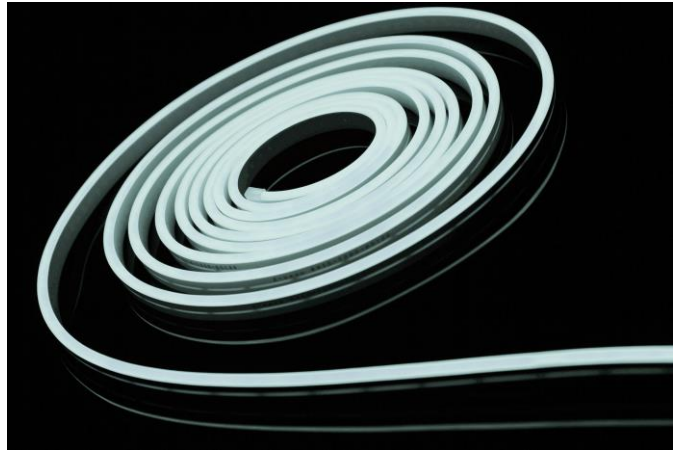

## TECHNICAL DATA

Product Code	NGA/LL/NF/0612/H/8/DYN/2757/68/EE
Light Fixture Type	Horizontal Bending Fusion Neon
Cable Entry (EE)	End cable entry only
Cutting Interval	50mm
Dimensions	W:6.5 x H:12mm
IP Rating	IP68
Bending Diameter	60mm Max
Efficacy	40lm/w

Power	8w
IK Rating	N/A
Supply Voltage	24V DC
CRI	≥90
Warranty	5 years (3 years when submerged)
MacAdam Step	2SDCM
Control Gear	0-10 / DALI / DMX
Mounting Clip Dims	15 x 8.1 x 10.3mm (L x W x H)

Colour Temperature	2700k	5700k	2700k +5700k	-	-
Lumen Output	162lm	163lm	323lm	-	-

### HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

# NGA

## CABLE ENTRY




End Cable Entry

## MOUNTING ACCESSORIES




Mounting Clips: 15 x 8.1 x 10.3mm

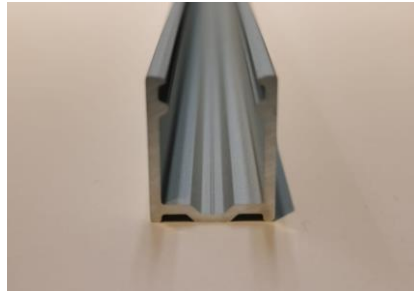


Aluminium Profile: 1000 x 8.9 x 13.2mm

## UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.

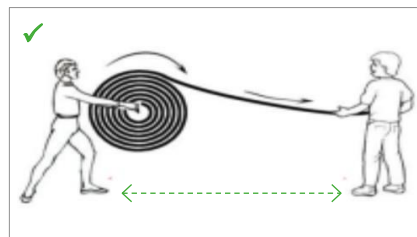

Distance <1.5m

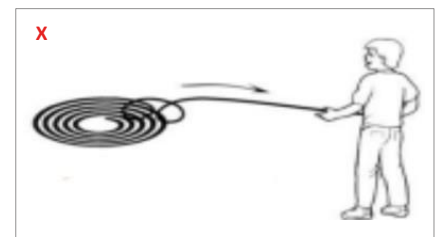

Do not twist

### HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com