FUSION NEON 1010V 10W/M IP68

NGA/LL/NF/1010/V/10/XXXX/68/EE

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Vertical Bend 10w IP68 Fusion Neon

PRODUCT NOTES

Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.

The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request.

PRODUCT CODE BUILDER

Specify colour temperature with your enquiry. XXXX = Colour Temperature


E.g., NGA/LL/NF/1010/V/10/3500/68/EE










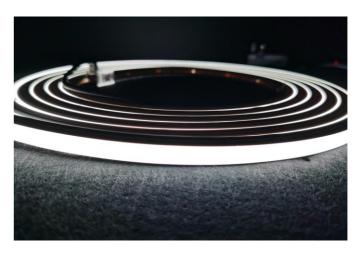



TECHNICAL DATA

Product Code	NGA/LL/NF/1010/V/10/XXXX/68/EE		
Light Fixture Type	Vertical Bending Fusion Neon		
Cable Entry	End cable entry only		
Cutting Interval	41mm		
Dimensions	W:10 x H:10mm		
IP Rating	IP68		
Bending Diameter	150mm		
Efficacy	79lm/w (4000k)		

Power	10w/m
IK Rating	N/A
SupplyVoltage	24V DC
CRI	≥90
Warranty	5 years (3 years when submerged)
MacAdam Step	2SDCM
Control Gear	On/Off / Mains / 0-10 / DALI / DMX
Mounting Clip Dims	8 x 12.1 x 7.7mm (L x W x H)

Colour Temperature	2700k	3000k	3500k	4000k	6000k
Lumen Output	715lm	788lm	784lm	789lm	749lm

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk



CABLE ENTRY




End Cable Entry (EE)

MOUNTING ACCESSORIES




Mounting Clips: 8 x 12.1 x 7.7mm




Aluminium Profile: 1000 x 12.4 x12.9mm

UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.



Distance <1.5m



Do not twist

