

FUSION NEON 1010V 5W/M IP68

NGA/LL/NF/1010/V/5/XXXX/68/EE

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Vertical Bend 5w IP68 Fusion Neon

PRODUCT NOTES

Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.



The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request.

PRODUCT CODE BUILDER

Specify colour temperature with your enquiry.

XXXX = Colour Temperature

E.g., **NGA/LL/NF/1010/V/5/3500/68/EE**

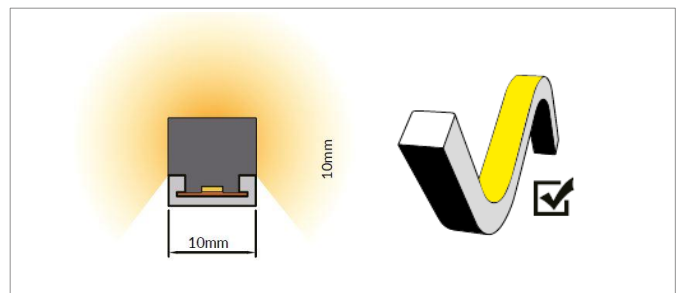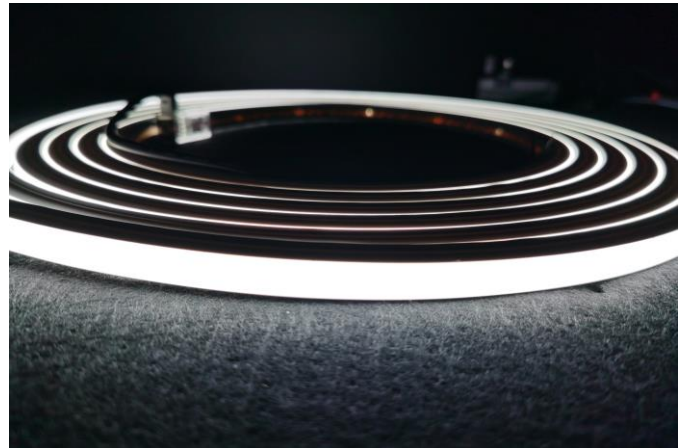

TECHNICAL DATA

Product Code	NGA/LL/NF/1010/V/5/XXXX/68/EE
Light Fixture Type	Vertical Bending Fusion Neon
Cable Entry	End cable entry only
Cutting Interval	41mm
Dimensions	W:10 x H:10mm
IP Rating	IP68
Bending Diameter	150mm
Efficacy	81lm/w (4000k)

Power	5w/m
IK Rating	N/A
Supply Voltage	24V DC
CRI	≥90
Warranty	5 years (3 years when submerged)
MacAdam Step	2SDCM
Control Gear	On/Off / Mains / 0-10 / DALI / DMX
Mounting Clips Dims	8 x 12.1 x 7.7mm (L x W x H)

Colour Temperature	2700k	3000k	3500k	4000k	6000k
Lumen Output	336lm	346lm	337lm	406lm	376lm

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA

CABLE ENTRY




End Cable Entry (EE)

MOUNTING ACCESSORIES




Mounting Clips: 8x12.1x7.7mm

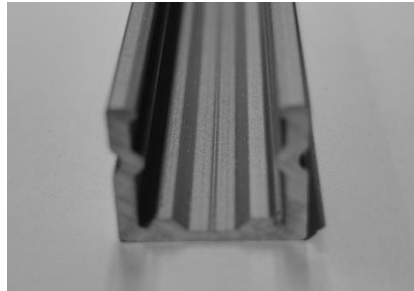


Aluminium Profile: 1000x12.5x14.6mm

UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.

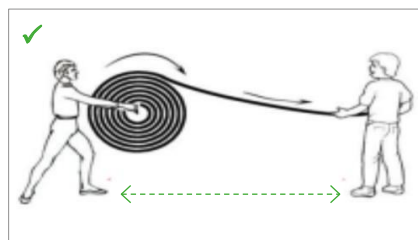

Distance <1.5m

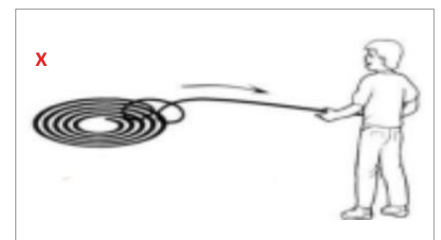

Do not twist

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com