

# FUSION NEON 1010 V DYN 10W/M IP68

NGA/LL/NF/1010/V/10/DYN/2760/68/EE

LED SPECIFICATION SHEET

## PRODUCT DESCRIPTION

Vertical Bend 10w Dynamic White IP68 Fusion Neon



## PRODUCT NOTES

Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.

The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request. Standard colour range is 2700-6000k. Custom ranges available upon request.

## PRODUCT CODE BUILDER

N/A

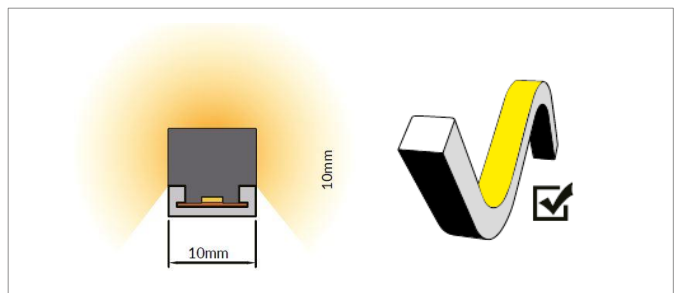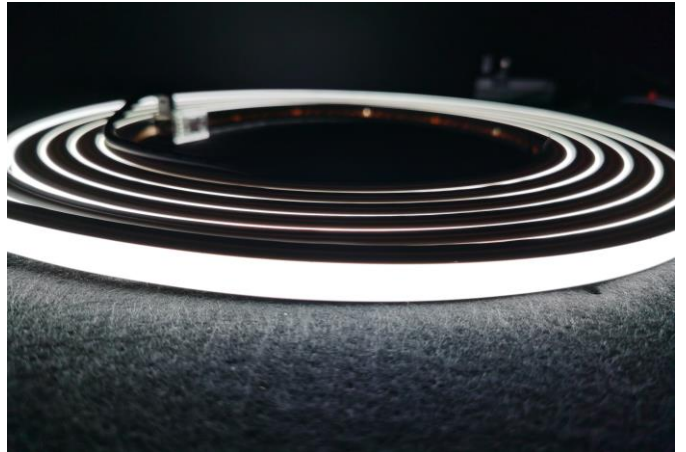

## TECHNICAL DATA

Product Code	NGA/LL/NF/1010/V/10/DYN/2760/68/EE
Light Fixture Type	Vertical Bending Fusion Neon
Cable Entry	End cable entry only
Cutting Interval	50mm
Dimensions	W:10 x H:10mm
IP Rating	IP68
Bending Diameter	150mm
Efficacy	89lm/w (2700+6000k)

Power	10w/m
IK Rating	N/A
Supply Voltage	24V DC
CRI	≥90
Warranty	5 years (3 years when submerged)
MacAdam Step	2SDCM
Mounting Clip Dims	0-10 / DALI / DMX
Mounting Clip Dims	8 x 12.1 x 7.7mm (L x W x H)

Colour Temperature	2700k	6000k	2700+6000k	-	-
Lumen Output	432lm	462lm	886lm	-	-

## HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

## MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

# NGA

## CABLE ENTRY




End Cable Entry (EE)

## MOUNTING ACCESSORIES




Mounting Clips: 8 x 12.1 x 7.7mm

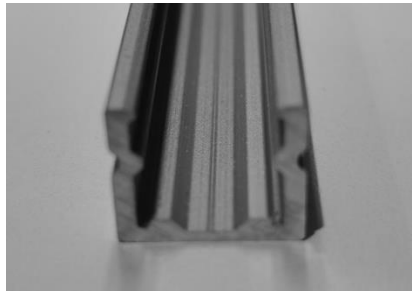


Aluminium Profile: 1000 x 12.4 x 12.9mm

## UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.

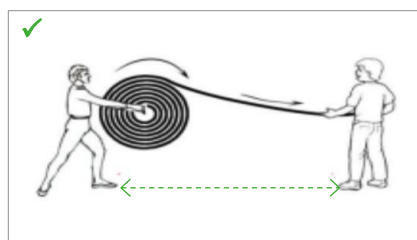

Distance <1.5m

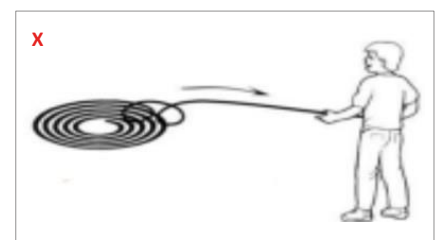

Do not twist

### HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com