

FUSION NEON 1010V 10W/M RGB IP68

NGA/LL/NF/1010/V/10/RGB/68/EE

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Vertical Bend 10w RGB IP68 Fusion Neon



PRODUCT NOTES

Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.

The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request.

PRODUCT CODE BUILDER

N/A

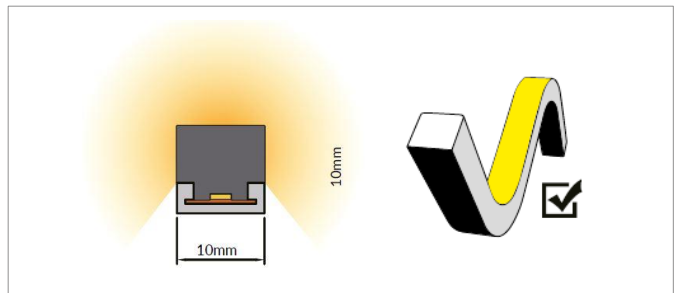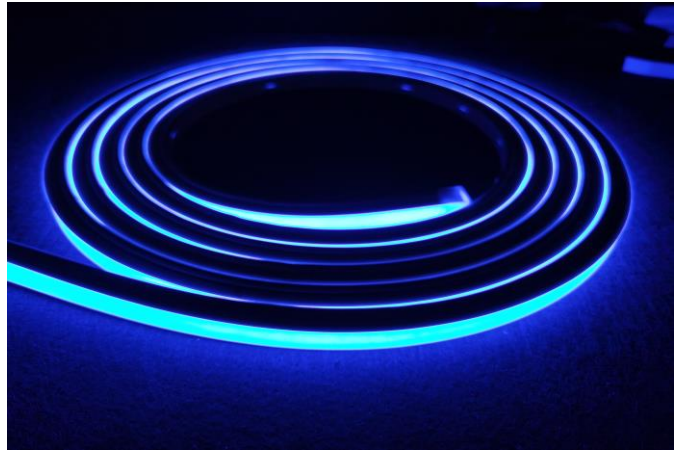

TECHNICAL DATA

Product Code	NGA/LL/NF/1010/V/10/RGB/68/EE
Light Fixture Type	Vertical Bending Fusion Neon
Cable Entry	End cable entry only
Cutting Interval	62.5mm
Dimensions	W:10 x H:10mm
IP Rating	IP68
Bending Diameter	150mm
Efficacy	39lm/w (RGB)

Power	10w/m
IK Rating	N/A
Supply Voltage	24V DC
CRI	N/A
Warranty	5 years (3 years when submerged)
MacAdam Step	2SDCM
Control Gear	0-10 / DALI / DMX
Mounting Clip Dims	8 x 12 x 7.7mm (L x W x H)

Colour Temperature	RED	GREEN	BLUE	RGB	-
Lumen Output	85lm	256lm	50lm	390lm	-

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-areal.com

NGA

CABLE ENTRY




End Cable Entry (EE)

MOUNTING ACCESSORIES




Mounting Clips: 8 x 12.1 x 7.7mm

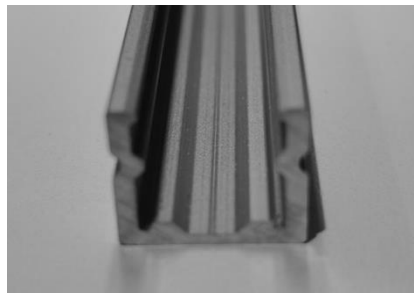


Aluminium Profile: 1000 x 12.4 x 12.9mm

UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.

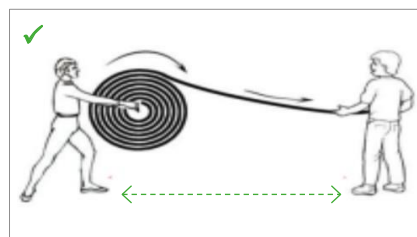

Distance <1.5m

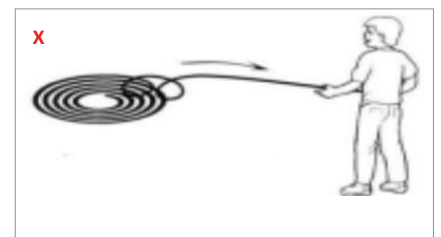

Do not twist

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com