

# FUSION NEON 1220H 5W/M IP68

NGA/LL/NF/1220/H/5/XXXX/68/CE

LED SPECIFICATION SHEET

## PRODUCT DESCRIPTION

Horizontal bend 5w IP68 Fusion Neon

## PRODUCT NOTES

Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.

The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request.


## PRODUCT CODE BUILDER

Specify colour temperature with your enquiry.

XXXX = Colour Temperature

CE = Cable Entry

E.g., NGA/LL/NF/1220/H/5/3500/68/RE

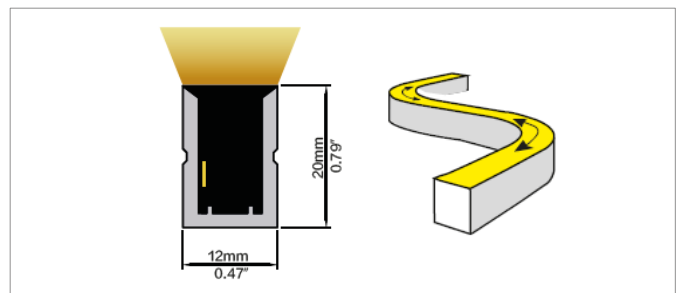

## TECHNICAL DATA

Product Code	NGA/LL/NF/1220/H/5/XXXX/68/CE
Light Fixture Type	Horizontal Bending Fusion Neon
Cable Entry	End / Rear / Side L / Side R
Cutting Interval	41mm
Dimensions	W:12 x H:20mm
IP Rating	IP68
Bending Diameter	300mm
Efficacy	53lm/w (4000k)

Power	5w/m
IK Rating	IK08
Supply Voltage	24V DC
CRI	≥90
Warranty	5 years (3 years when submerged)
MacAdam Step	2SDCM
Control Gear	On/Off / Mains / 0-10 / DALI / DMX
Mounting Clip Dims	15 x 13.8 x 12.8mm (L x W x H)

Colour Temperature	2700k	3000k	3500k	4000k	6000k
Lumen Output	228lm	262lm	255lm	264lm	232lm

### HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

# NGA

## CABLE ENTRY



End Cable Entry (EE)



Side Cable Entry (SE)




Rear Cable Entry (RE)

## MOUNTING ACCESSORIES




Mounting Clips: 15x13.8x12.8mm

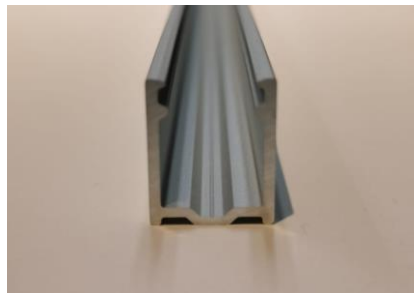


Aluminium Profile: 1000x14.4x21.4mm

## UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.

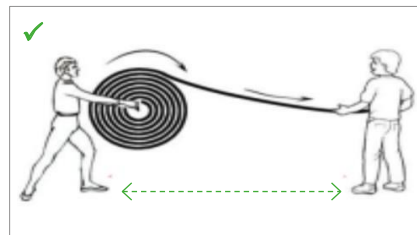

Distance <1.5m

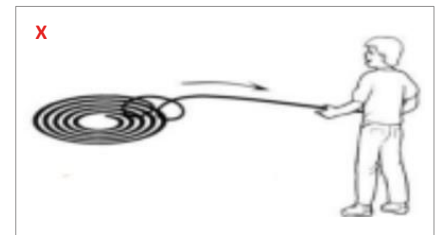

Do not twist

### HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com