

FUSION NEON 1220H DYN WHITE 15W/M IP68

NGA/LL/NF/1220/H/15/DYN/2760/68/CE

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Horizontal bend 15w IP68 Dynamic White Fusion Neon

PRODUCT NOTES

Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.


The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request.

Standard colour range is 2700-6000k. Custom ranges available upon request.

PRODUCT CODE BUILDER

CE = Cable Entry

E.g., NGA/LL/NF/1220/H/15/DYN/2760/68/RE

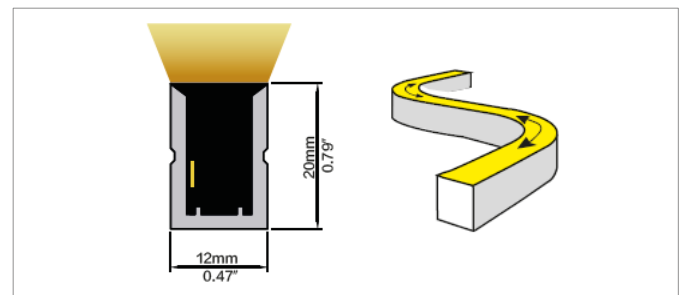

TECHNICAL DATA

Product Code	NGA/LL/NF/1220/H/15/DYN/2760/68/CE
Light Fixture Type	Horizontal Bending Fusion Neon
Cable Entry	End / Rear / Side L / Side R
Cutting Interval	50mm
Dimensions	W:12 x H:20mm
IP Rating	IP68
Bending Diameter	300mm
Efficacy	55lm/w (2700+6000k)

Power	15w/m
IK Rating	IK08
Supply Voltage	24V DC
CRI	≥90
Warranty	5 years (3 years when submerged)
MacAdam Step	2SDCM
Control Gear	0-10 / DALI / DMX
Mounting Clip Dims	15 x 13.8 x 12.8mm (L x W x H)

Colour Temperature	2700k	6000k	2700+6000k	-	-
Lumen Output	406lm	422lm	821lm	-	-

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA

CABLE ENTRY



End Cable Entry (EE)



Side Cable Entry (SE)




Rear Cable Entry (RE)

MOUNTING ACCESSORIES




Mounting Clips: 15x13.8x12.8mm

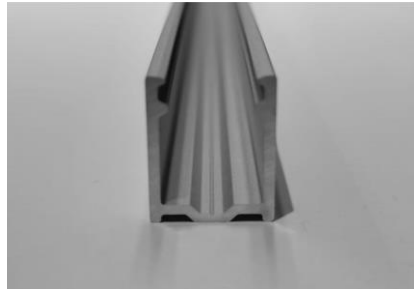


Aluminium Profile: 1000x14.4x21.4mm

UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.

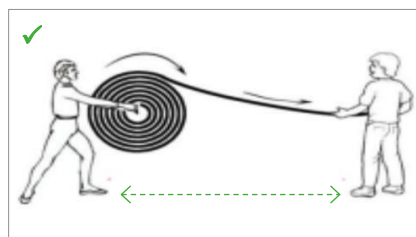

Distance <math>< 1.5\text{m}</math>

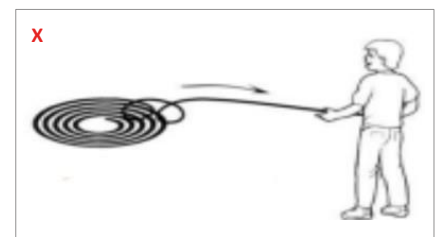

Do not twist

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com