

FUSION NEON 1220H RGB 10W/M IP68

NGA/LL/NF/1220/H/10/RGB/68/CE

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Horizontal bend 10w IP68 RGB Fusion Neon

PRODUCT NOTES



Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.

The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request.

PRODUCT CODE BUILDER

CE = Cable Entry

E.g., NGA/LL/NF/1220/H/10/RGB/68/RE

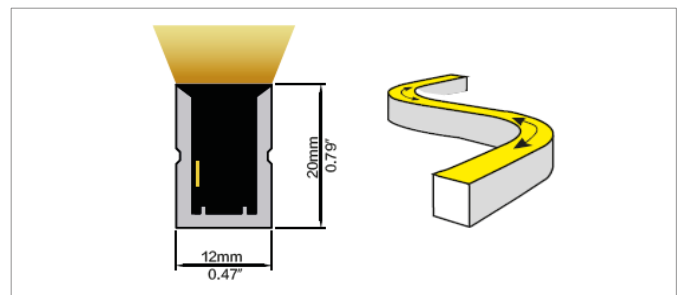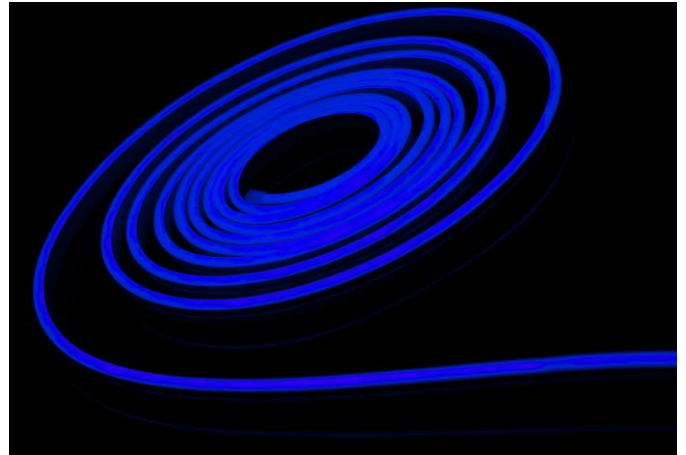

TECHNICAL DATA

Product Code	NGA/LL/NF/1220/H/10/RGB/68/CE
Light Fixture Type	Horizontal Bending Fusion Neon
Cable Entry	End / Rear / Side L / Side R
Cutting Interval	71mm
Dimensions	W:12 x H:20mm
IP Rating	IP68
Bending Diameter	300mm
Efficacy	24lm/w (RGB)

Power	10w/m
IK Rating	IK08
Supply Voltage	24V DC
CRI	N/A
Warranty	5 years (3 years when submerged)
MacAdam Step	2SDCM
Control Gear	0-10 / DALI / DMX
Mounting Clip Dims	15 x 13.8 x 12.8mm (L x W x H)

Colour Temperature	RED	GREEN	BLUE	RGB	-
Lumen Output	61lm	150lm	35lm	241lm	-

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA

CABLE ENTRY



End Cable Entry (EE)



Side Cable Entry (SE)




Rear Cable Entry (RE)

MOUNTING ACCESSORIES




Mounting Clips: 15x13.8x12.8mm

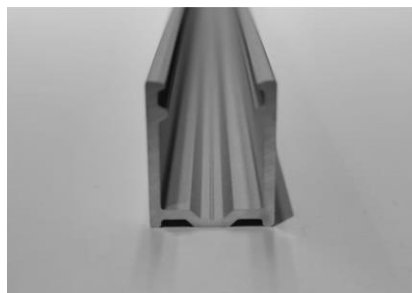


Aluminium Profile: 1000x14.4x21.4mm

UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.

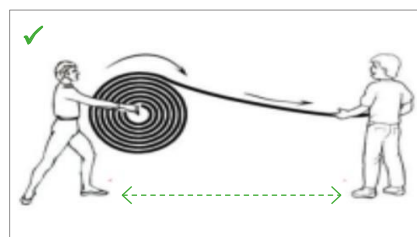

Distance <math>< 1.5\text{m}</math>

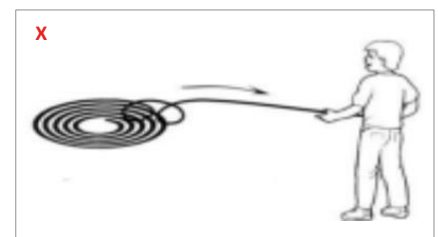

Do not twist

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com