

FUSION NEON 1515V RGBW PIXEL 19W/M IP67

NGA/LL/NF/1515/V/19/RGBWP/W-3000/67

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Vertical bend 19w IP67 Pixel Fusion Neon


PRODUCT NOTES

Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.

The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request.

PRODUCT CODE BUILDER

E.g., NGA/LL/NF/1515/V/19/RGBWP/67/RE

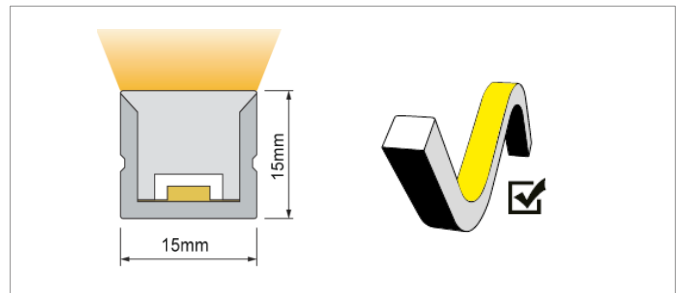

TECHNICAL DATA

Product Code	NGA/LL/NF/1515/V/19/RGBP/W-3000/67
Light Fixture Type	Vertical Bending Fusion Neon
Cable Entry	End / Rear / Side L / Side R
Cutting Interval	100mm
Dimensions	W:15 x H15mm
IP Rating	IP67
Bending Diameter	120mm
Efficacy	21.84lm/w (RGBW)

Power	19w
IK Rating	N/A
Supply Voltage	24V DC
CRI	≥90
Warranty	5 years
MacAdam Step	2SDCM
Control Gear	DMX
Mounting Clip Dims	35x19x19mm (L x W x H)

Colour Temperature	RED	GREEN	BLUE	W-3000K	RGBW
Lumen Output	62lm	142lm	31lm	180lm	415lm

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA

CABLE ENTRY



End Cable Entry (EE)



Side Cable Entry (SE)




Rear Cable Entry (RE)

MOUNTING ACCESSORIES

FUSION NEON 1515



Mounting Clips: 35x19x19mm




Aluminium Profile: 1000x19x191mm
2000x19x191mm




UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.

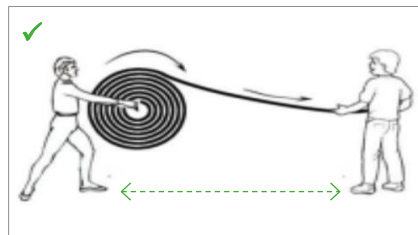

Distance < 1.5m

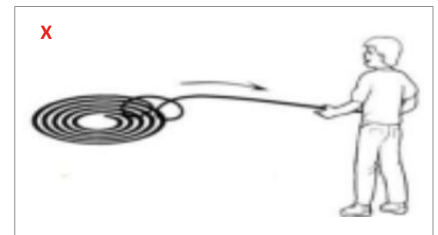

Do not twist

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com