

FUSION NEON 1615V DYN 15W/M IP67

NGA/LL/NF/1615/V/15/DYN/2753/67/CE

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Vertical bend 15w IP67 Dynamic White Fusion Neon

PRODUCT NOTES

Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.



The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request.

Standard colour range is 2700-5300k. Custom ranges available upon request.

PRODUCT CODE BUILDER

CE = Cable Entry

E.g. NGA/LL/NF/1615/V/15/DYN/2753/67/RE

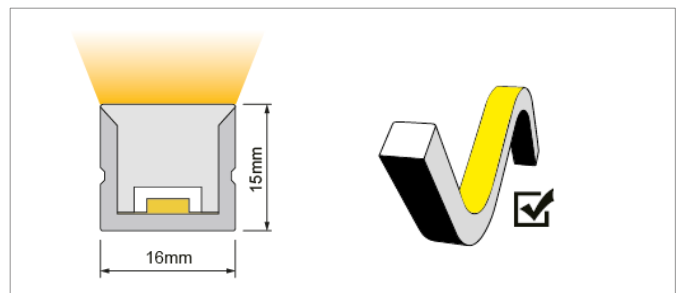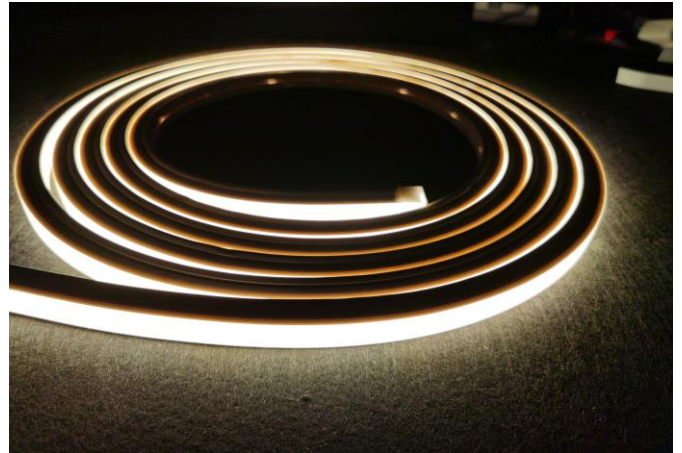

TECHNICAL DATA

Product Code	NGA/LL/NF/1615/V/15/DYN/2753/67/CE
Light Fixture Type	Vertical Bending Fusion Neon
Cable Entry	End / Rear / Side L / Side R
Cutting Interval	50mm
Dimensions	W:16 x H:15mm
IP Rating	IP67
Bending Diameter	240mm
Efficacy	68lm/w (2700+5300k)

Power	15w
IK Rating	IK08
Supply Voltage	24V DC
CRI	≥90
Warranty	5 years
MacAdam Step	2SDCM
Control Gear	On/Off / Mains / 0-10 / DALI / DMX
Mounting Clip Dims	20 x 16.6 x 12.4mm (L x W x H)

Colour Temperature	2700k	5300k	2700+5300k	-	-
Lumen Output	514lm	511lm	1024lm	-	-

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA

CABLE ENTRY



End Cable Entry (EE)



Side Cable Entry (SE)




Rear Cable Entry (RE)

MOUNTING ACCESSORIES




Mounting Clips: 20x16.6x12.4mm

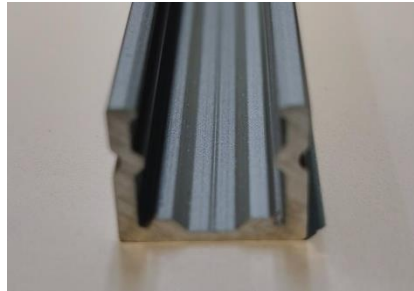


Aluminium Profile: 1000x20.5x17.6mm

UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.

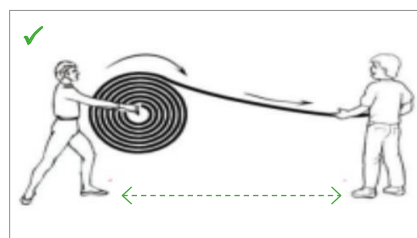

Distance <math>< 1.5\text{m}</math>

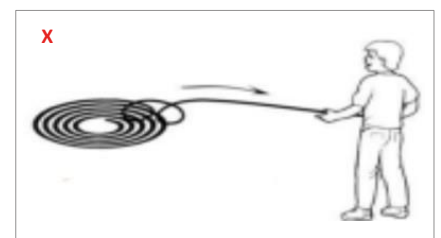

Do not twist

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com