

FUSION NEON 1615V RGBW 15W/M IP67

NGA/LL/NF/1615/V/15/RGBW-27/67/CE

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Vertical bend 15w RGBW Fusion Neon

PRODUCT NOTES

Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.


The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request.

The white chip is supplied as 2700k as standard however please contact a member of the team if another colour temperature is required.

PRODUCT CODE BUILDER

CE = Cable Entry

E.g., **NGA/LL/NF/1615/V/15/RGBW-27/67/RE**

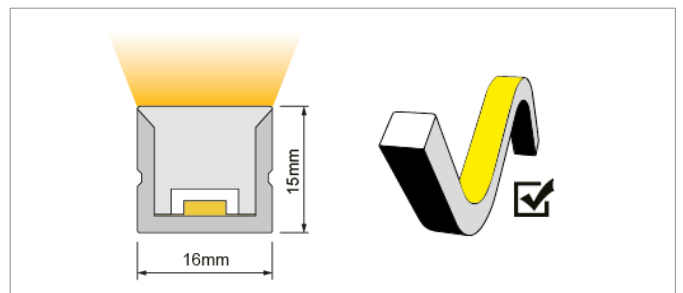

TECHNICAL DATA

Product Code	NGA/LL/NF/1615/V/15/RGBW-27/67/CE
Light Fixture Type	Vertical Bending Fusion Neon
Cable Entry	End / Rear / Side L / Side R
Cutting Interval	125mm
Dimensions	W:16 x H:15mm
IP Rating	IP67
Bending Diameter	240mm
Efficacy	34lm/w (RGBW)

Power	15w/m
IK Rating	IK08
Supply Voltage	24V DC
CRI	N/A
Warranty	5 years
MacAdam Step	2SDCM
Control Gear	0-10 / DALI / DMX
Mounting Clip Dims	20 x 16.6 x 12.4mm (L x W x H)

Colour Temperature	Red	Green	Blue	2700k	RGBW
Lumen Output	63lm	192lm	57lm	205lm	517

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA

CABLE ENTRY



End Cable Entry (EE)



Side Cable Entry (SE)




Rear Cable Entry (RE)

MOUNTING ACCESSORIES




Mounting Clips: 20 x 16.6 x 12.4mm

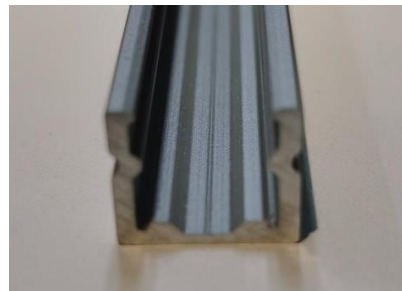


Aluminium Profile: 1000 x 20.5 x 17.6mm

UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.

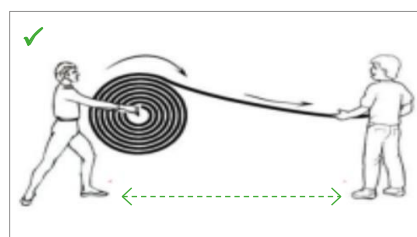

Distance <math>< 1.5\text{m}</math>

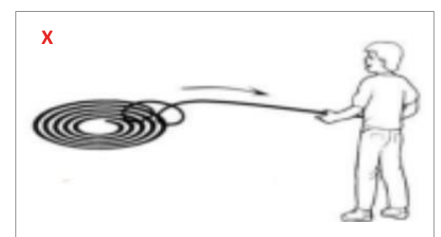

Do not twist

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com