

FUSION NEON 1615VH 10W/M IP67

NGA/LL/NF/1615/VH/10/XXXX/67/CE

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Dual bending 10w IP67 Fusion Neon

PRODUCT NOTES

Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.



The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request.

PRODUCT CODE BUILDER

XXXX = Colour Temperature

CE = Cable Entry

E.g., NGA/LL/NF/1615/VH/10/3000/67/RE

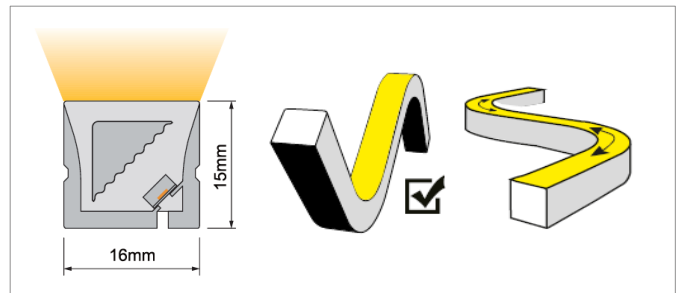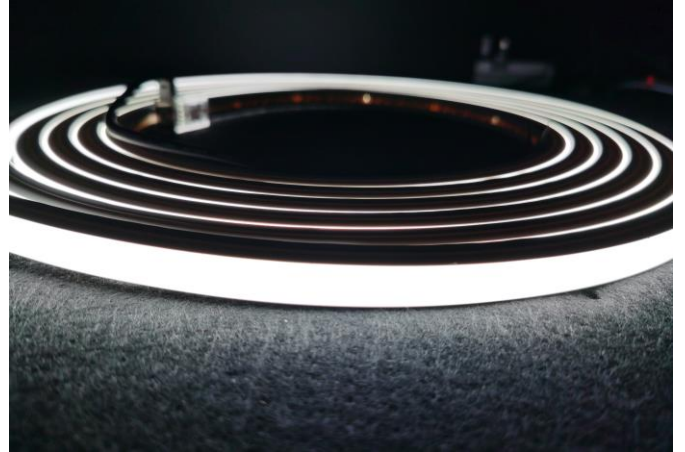

TECHNICAL DATA

Product Code	NGA/LL/NF/1615/VH/10/XXXX/67/CE
Light Fixture Type	Vertical/ Horizontal Bend Fusion Neon
Cable Entry	End / Rear / Side L / Side R
Cutting Interval	50mm
Dimensions	W:16 x H:15mm
IP Rating	IP67
Bending Diameter	200mm in both directions
Efficacy	72lm/w (4000k)

Power	10w/m
IK Rating	N/A
Supply Voltage	24V DC
CRI	≥90
Warranty	5 years
MacAdam Step	2SDCM
Control Gear	On/Off / Mains / 0-10 / DALI / DMX
Mounting Clip Dims	20 x 16.6 x 12.4mm (L x W x H)

Colour Temperature	2700k	3000k	3500k	4000k	5000k
Lumen Output	692lm	703lm	711lm	720lm	736lm

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA

CABLE ENTRY



End Cable Entry (EE)



Side Cable Entry (SE)




Rear Cable Entry (RE)

MOUNTING ACCESSORIES




Mounting Clips: 20x16.6x12.4mm

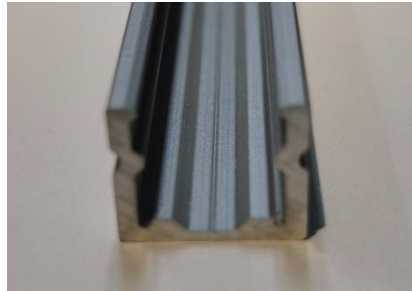


Aluminium Profile: 1000x20.5x17.6mm

UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.

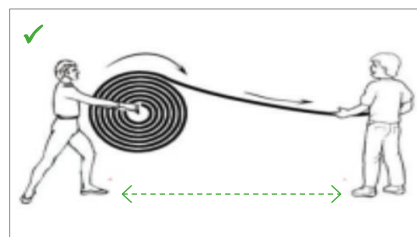

Distance <math>< 1.5\text{m}</math>

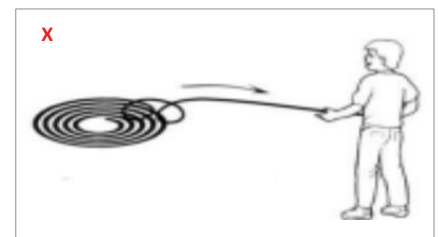

Do not twist

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com