

# FUSION FLEX 14.4W/M 128LED/M HE+ 3000K IP66

NGA/LL/SP/1/128/14.4/3000/66/HE



LED SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A Medium Output, High Efficiency LED Strip, designed to provide exceptional lighting performance with energy saving benefits.

## PRODUCT NOTES

- For optimal thermal performance, pair this LED strip with a suitable aluminium heat sink.
- To achieve a more homogeneous light output, use a profile with greater depth than the LED pitch. NGA profiles are recommended for best results.
- Custom-cut fixtures are available upon request to meet specific project requirements.

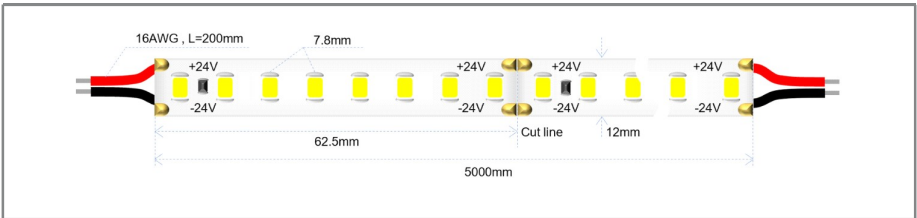

## TECHNICAL INFORMATION

|                    |                                 |
|--------------------|---------------------------------|
| Product Code       | NGA/LL/SP/1/128/14.4/3000/66/HE |
| Product Group      | LED Strip                       |
| Power Consumption  | 14.4w/m                         |
| Supply Voltage     | 24V DC                          |
| Type               | Constant Voltage                |
| Lumen Output       | 2256                            |
| Efficacy           | 157lm/w                         |
| Colour Temperature | 3000K                           |
| CRI                | Ra≥90                           |
| MacAdam Step       | <3SDCM                          |
| Lifetime           | L80 50,000Hrs                   |

|                       |                                   |
|-----------------------|-----------------------------------|
| LEDs Per Meter        | 128 led/m                         |
| Cutting Interval      | 62.5mm                            |
| LED Pitch             | 7.8mm                             |
| Height                | 4.5mm                             |
| Width                 | 12mm                              |
| Max Run Length        | 6m                                |
| Control Gear          | On/Off/ Mains / 0-10 / DALI / DMX |
| IP Rating             | IP66                              |
| Operating Temperature | -20 to 50°C                       |
| Beam Angle            | 120°                              |
| Classification        | 3                                 |

### UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

# NGA