

# FUSION FLEX 19.2W/M MINI 3000K IP65

NGA/LL/SPM/1/280/19.2/3000/65




LED SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A Medium Output, High Performance LED Strip, with a sleek design for use in mini profiles.

## PRODUCT NOTES

- For optimal thermal performance, pair this LED strip with a suitable aluminium heat sink.
- To achieve a more homogeneous light output, use a profile with greater depth than the LED pitch. NGA profiles are recommended for best results.
- Custom-cut fixtures are available upon request to meet specific project requirements.

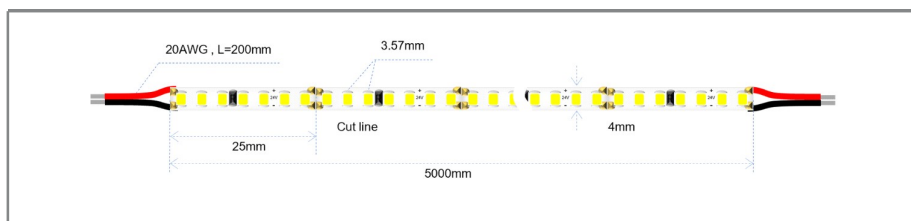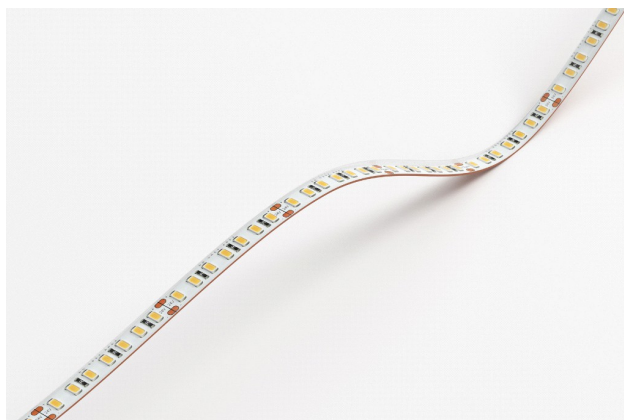

## TECHNICAL INFORMATION

Product Code	NGA/LL/SPM/1/280/19.2/3000/65
Product Group	LED Strip
Power Consumption	19.2w/m
Supply Voltage	24V DC
Type	Constant Voltage
Lumen Output	1930
Efficacy	101lm/w
Colour Temperature	3000K
CRI	Ra≥90
MacAdam Step	<3SDCM
Lifetime	L80 50,000Hrs

LEDs Per Meter	280 led/m
Cutting Interval	25mm
LED Pitch	3.57mm
Height	2.5mm
Width	4mm
Max Run Length	5m
Control Gear	On/Off/ Mains / 0-10 / DALI / DMX
IP Rating	IP65
Operating Temperature	-20 to 50°C
Beam Angle	120°
Classification	3

### UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

# NGA