

# FUSION FLEX 2.4W/M 6000K IP68

NGA/LL/SP/1/120/2.4/6000/68


LED SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A Low Output LED Strip, designed to provide high quality illumination for a range of applications.

## PRODUCT NOTES

- For optimal thermal performance, pair this LED strip with a suitable aluminium heat sink.
- To achieve a more homogeneous light output, use a profile with greater depth than the LED pitch. NGA profiles are recommended for best results.
- Custom-cut fixtures are available upon request to meet specific project requirements.

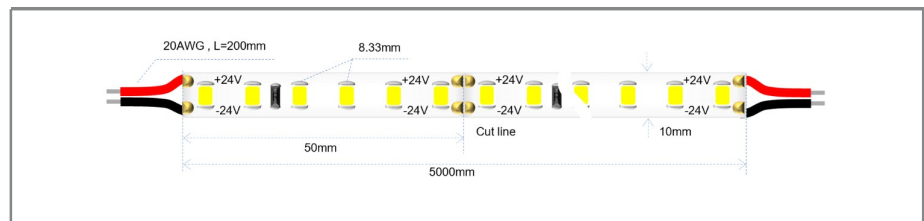

## TECHNICAL INFORMATION

Product Code	NGA/LL/SP/1/120/2.4/6000/68
Product Group	LED Strip
Power Consumption	2.4w/m
Supply Voltage	24V DC
Type	Constant Voltage
Lumen Output	245
Efficacy	102lm/w
Colour Temperature	6000K
CRI	Ra≥90
MacAdam Step	<3SDCM
Lifetime	L80 50,000Hrs

LEDs Per Meter	120 led/m
Cutting Interval	50mm
LED Pitch	8.33mm
Height	4.5mm
Width	10mm
Max Run Length	15m
Control Gear	On/Off/ Mains / 0-10 / DALI / DMX
IP Rating	IP68
Operating Temperature	-25 to 60°C
Beam Angle	120°
Classification	3

### UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

# NGA