

FUSION FLEX DTW 15W/M IP66

NGA/LL/DTW/VR/2/120120/15/30-18/66




LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

A Medium Output, Dim to Warm LED Strip, designed to provide a seamless transition from cool white to warm white as it dims. Offering a natural lighting effect similar to traditional incandescent bulbs, this innovative strip is perfect for creating a cosy ambiance or functional lighting in a wide range of spaces.

PRODUCT NOTES

- For optimal thermal performance, pair this LED strip with a suitable aluminium heat sink.
- To achieve a more homogeneous light output, use a profile with greater depth than the LED pitch. NGA profiles are recommended for best results.
- Custom-cut fixtures are available upon request to meet specific project requirements.

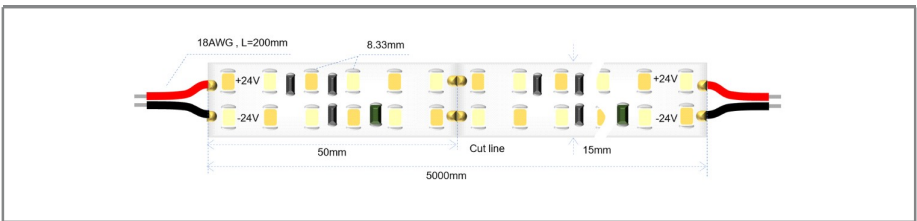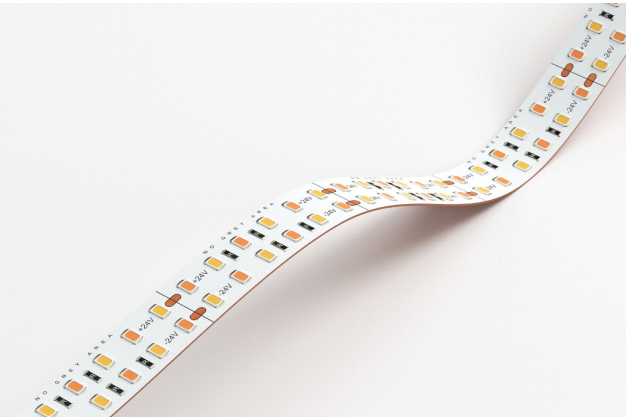

TECHNICAL INFORMATION

Product Code	NGA/LL/DTW/VR/2/120120/15/30-18/66
Product Group	LED Strip
Power Consumption	15w/m
Supply Voltage	24V DC
Type	Constant Voltage
Lumen Output	3K:1200
Efficacy	80lm/w
Colour Temperature	1800K - 3000K
CRI	Ra≥95
MacAdam Step	<3SDCM
Lifetime	50,000Hrs

LEDs Per Meter	120+120
Cutting Interval	50mm
LED Pitch	8.33mm
Height	1.3mm
Width	15mm
Max Run Length	5m
Control Gear	Mains / 0-10 / DALI / DMX
IP Rating	IP66
Operating Temperature	-40 to 55°C
Beam Angle	120°
Classification	3

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA