

# FUSION FLEX DYN 19.2W/M MINI 6 IP66

NGA/LL/SPM6/DYN/1/120120/19.2/21-65/66



LED SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A Medium Output, Dynamic White LED Strip with a sleek design for use in mini profiles. This dynamic strip offers tunable colour temperatures to create the ideal atmosphere in tight or detailed spaces.

## PRODUCT NOTES

- For optimal thermal performance, pair this LED strip with a suitable aluminium heat sink.
- To achieve a more homogeneous light output, use a profile with greater depth than the LED pitch. NGA profiles are recommended for best results.
- Custom-cut fixtures are available upon request to meet specific project requirements.

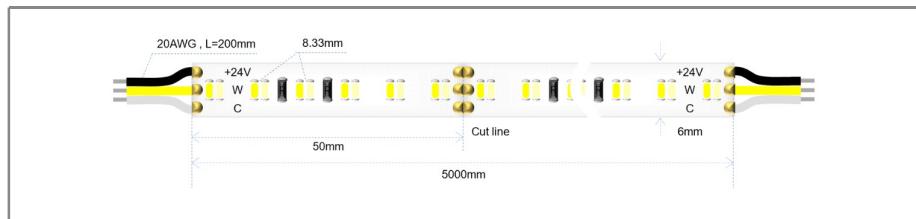

## TECHNICAL INFORMATION

Product Code	NGA/LL/SPM6/DYN/1/120120/19.2/21-65/66
Product Group	LED Strip
Power Consumption	19.2w/m
Supply Voltage	24V DC
Type	Constant Voltage
Lumen Output	21K:671 65K:940 MAX:1740
Efficacy	90lm/w
Colour Temperature	2100K - 6500K
CRI	Ra≥90
MacAdam Step	<3SDCM
Lifetime	50,000Hrs

LEDs Per Meter	120+120 led/m
Cutting Interval	50mm
LED Pitch	8.33mm
Height	1.5mm
Width	6mm
Max Run Length	5m
Control Gear	0-10 / DALI / DMX
IP Rating	IP66
Operating Temperature	-40 to 55°C
Beam Angle	120°
Classification	3

## UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

## MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA