

# FUSION FLEX DYN 20W/M IP67

NGA/LL/DYN/1/9696/20/21-65/67



LED SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A Medium Output, Dynamic White LED Strip, designed to offer tunable colour temperatures to create the ideal atmosphere in any space. With the ability to seamlessly transition between warm and cool whites, this dynamic strip is suitable for a wide variety of lighting applications.

## PRODUCT NOTES

- For optimal thermal performance, pair this LED strip with a suitable aluminium heat sink.
- To achieve a more homogeneous light output, use a profile with greater depth than the LED pitch. NGA profiles are recommended for best results.
- Custom-cut fixtures are available upon request to meet specific project requirements.

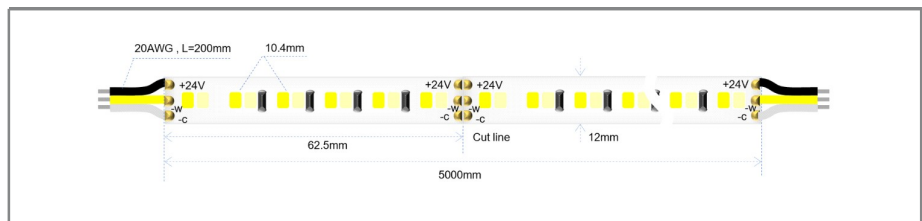

## TECHNICAL INFORMATION

Product Code	NGA/LL/DYN/1/9696/20/21-65/67
Product Group	LED Strip
Power Consumption	20w/m
Supply Voltage	24V DC
Type	Constant Voltage
Lumen Output	21K:657 65K:920 MAX:1750
Efficacy	88lm/w
Colour Temperature	2100K - 6500K
CRI	Ra≥90
MacAdam Step	<3SDCM
Lifetime	50,000Hrs

LEDs Per Meter	96+96 led/m
Cutting Interval	62.5mm
LED Pitch	10.4mm
Height	4.5mm
Width	12mm
Max Run Length	5m
Control Gear	0-10 / DALI / DMX
IP Rating	IP67
Operating Temperature	-40 to 55°C
Beam Angle	120°
Classification	3

### UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

# NGA