


FLEXCURVE SURFACE 2525

NGAC25

SPECIFICATION SHEET



PRODUCT DESCRIPTION

A surface-mounted or suspended curved aluminium profile with a slim form factor that creates a sleek, direct lighting effect. Suitable for circular and freeform designs, it offers flexibility for creative architectural and commercial lighting. Custom joiners can be used to achieve smooth, continuous curves.

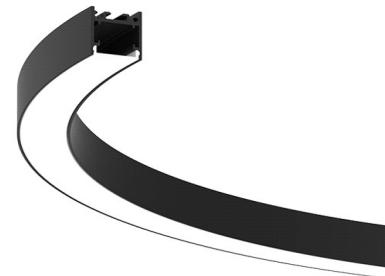

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 60 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: New Opal 74%.

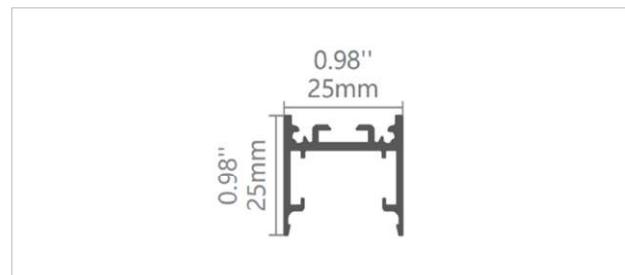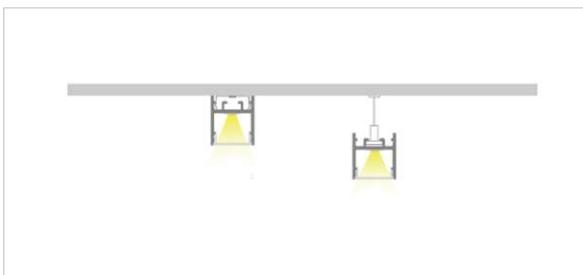

TECHNICAL INFORMATION

| | |
|--------------------|---------------------------|
| Product Code | NGAC25 |
| Product Group | Aluminium Profile |
| Installation Type | Surface or Suspended |
| Light Distribution | Direct |
| Profile Material | Curved extruded aluminium |
| Profile Finish | Black / White / RAL |
| Diffuser Material | PMMA |
| Diffuser Options | New Opal |

| | |
|-----------------|---|
| Profile Type | Curved (min Radius ≥ 300 mm) |
| Dimensions | W 25 x H 25mm |
| Weight | 0.438 kg/m |
| Max Power | 28.8W/m |
| Max Strip Width | 16mm |
| Beam Angle | 70° |
| IP Rating | IP20 |
| Accessories | Aluminium end caps/ Suspension kit/ Joiners |

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA