


# FLEXCURVE SURFACE 2538

NGAC25H

SPECIFICATION SHEET



## PRODUCT DESCRIPTION

A surface-mounted or suspended curved aluminium profile with a distinctive "H" design, offering direct lighting in upward, downward, or combined configurations. Its versatile form allows for the creation of rings or mixed compositions of lines and curves in various lengths and angles. Ideal for fitness rooms, offices, displays, shopping centres, and other indoor commercial spaces.

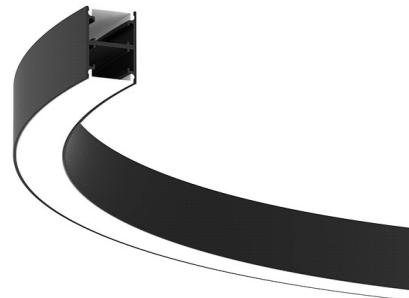

## PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 60 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: New Opal 74%.

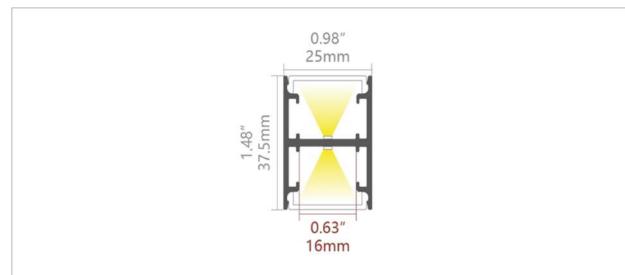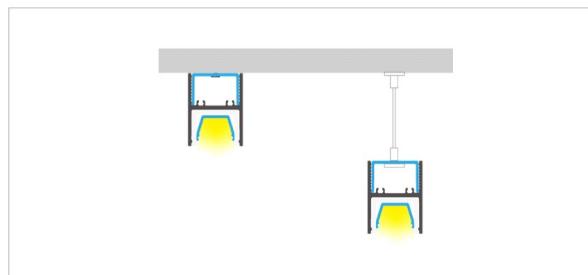

## TECHNICAL INFORMATION

Product Code	NGAC25H
Product Group	Aluminium Profile
Installation Type	Surface or Suspended
Light Distribution	Direct/Indirect
Profile Material	Curved extruded aluminium
Profile Finish	Black / White / RAL
Diffuser Material	PMMA
Diffuser Options	New Opal

Profile Type	Curved (min Radius $\geq$ 300 mm)
Dimensions	W 25 x H 38mm
Weight	0.566 kg/m
Max Power	28.8W/m
Max Strip Width	16mm
Beam Angle	70°
IP Rating	IP20
Accessories	Aluminium end caps/ Suspension kit/ Joiners

## UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

## MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA