

FLEXLINE CORNER 1818 60°

NGA1818L

SPECIFICATION SHEET



PRODUCT DESCRIPTION

A surface-mounted corner aluminium profile designed to direct light at a 45° angle. It features a curved optical diffuser that shapes the output into a 60° beam, reducing glare and providing smooth, directional illumination across adjacent surfaces. Ideal for both ambient and accent lighting applications.



PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Milky 65–70%, Opal 75%, Frost 85–90%, Clear 95%.

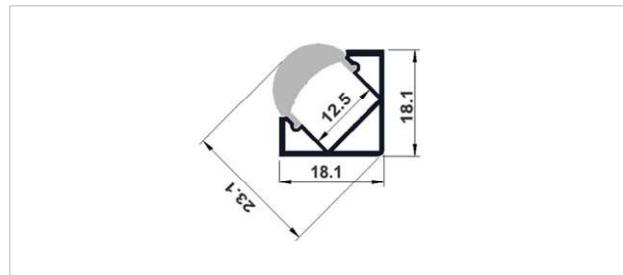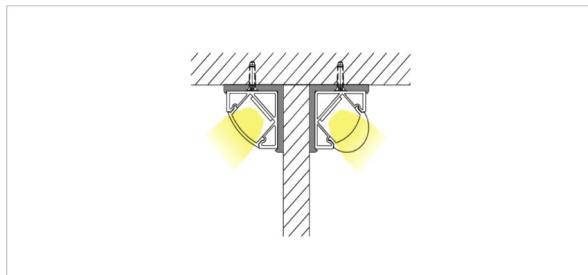

TECHNICAL INFORMATION

Product Code	NGA1818L
Product Group	Aluminium Profile
Installation Type	Corner
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 18.1 x H 18.1mm
Weight	0.255 kg/m
Max Power	15W/m
Max Strip Width	12mm
Beam Angle	60°
IP Rating	IP20
Accessories	Plastic end caps/ Mounting clips

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA