

# FLEXLINE CORNER 1919

NGA1919



SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A surface-mounted corner aluminium profile designed for 45° light projection, ideal for surface applications in cabinetry, display lighting, and architectural detailing. Its robust body and angled channel offer efficient thermal management and reduced glare, while integrated fins enhance heat dissipation for more demanding lighting setups. Suitable for installations requiring a clean, angular lighting effect.

## PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Milky 65–70%, Opal 75%, Frost 85–90%, Clear 95%.

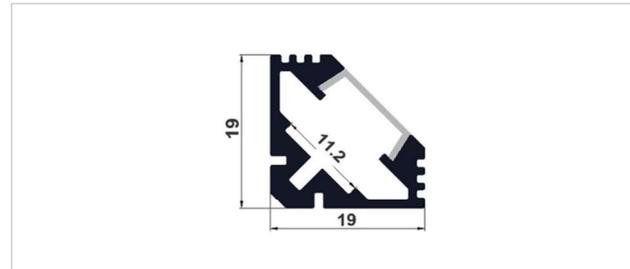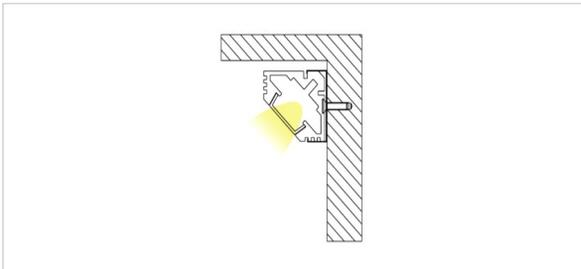

## TECHNICAL INFORMATION

Product Code	NGA1919
Product Group	Aluminium Profile
Installation Type	Corner
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 19 x H 19mm
Weight	0.35 kg/m
Max Power	20W/m
Max Strip Width	11mm
Beam Angle	120°
IP Rating	IP20
Accessories	Plastic end caps/ Metal mounting clips

### UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

# NGA