

FLEXLINE PLASTER-IN 5914

NGA5914




SPECIFICATION SHEET

PRODUCT DESCRIPTION

A trimless aluminium profile designed for seamless integration into plasterboard ceilings and walls. Featuring a 60° beam angle, it provides clean, uniform illumination with a flush diffuser, ideal for architectural lighting in residential and commercial interiors. The profile's frameless design supports a minimalist, visually continuous finish.

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 180 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%.

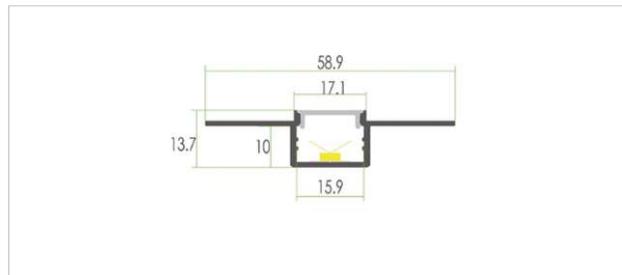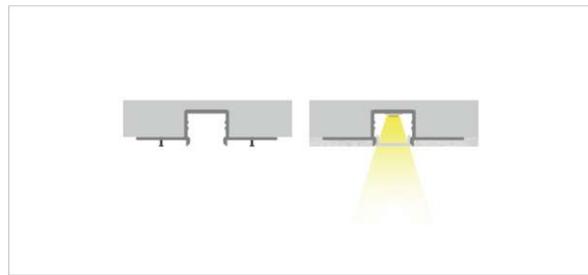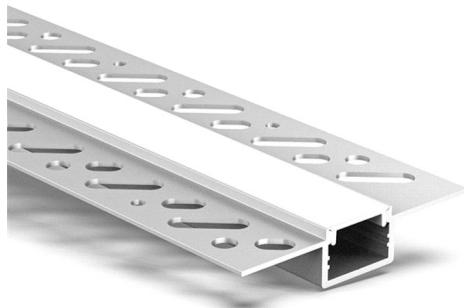

TECHNICAL INFORMATION

Product Code	NGA5914
Product Group	Aluminium Profile
Installation Type	Plaster-In
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA
Diffuser Options	Opal

Profile Type	Straight
Dimensions	W 58.9mm x H 13.7mm
Weight	0.267 kg/m
Max Power	19.2W/m
Max Strip Width	16mm
Beam Angle	60°
IP Rating	IP20
Accessories	Recessed wing/ Aluminium endcaps/ Spring clips/ Joiners

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA