

# FLEXLINE PLASTER-IN 8720

NGA8720

SPECIFICATION SHEET



## PRODUCT DESCRIPTION

A trimless aluminium profile in mill finish (non-anodized), designed for seamless integration into plasterboard ceilings and walls. Its curved internal geometry directs light at an angle, creating a soft wall-washing effect. Ideal for residential and commercial interiors, it provides indirect, low-glare illumination for architectural features and vertical surfaces where a clean, continuous aesthetic is desired.



## PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%, Milky 75%, Frost 89%, Clear 95%.

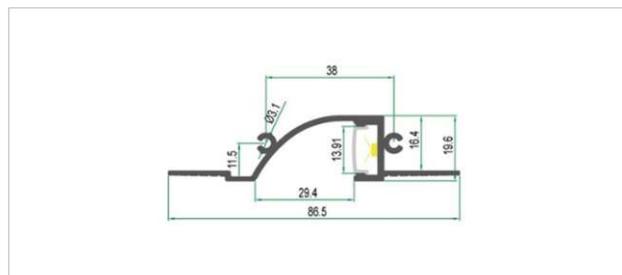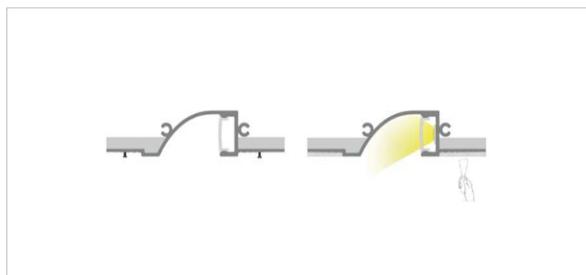

## TECHNICAL INFORMATION

Product Code	NGA8720
Product Group	Aluminium Profile
Installation Type	Plaster-In
Light Distribution	Indirect
Profile Material	Non Anodised (mill finish)
Profile Finish	Non-anodised / White / Black / RAL
Diffuser Material	PMMA / PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 86.5mm x H 19.6mm
Weight	0.608 kg/m
Max Power	14.4W/m
Max Strip Width	15mm
Beam Angle	100°
IP Rating	IP20
Accessories	Aluminium endcaps

### UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA