

FLEXLINE RECESSED 1409

NGA1409



SPECIFICATION SHEET

PRODUCT DESCRIPTION

A slim, recessed aluminium profile featuring a 50° beam angle, designed for flush integration into plasterboard, joinery, or other recessed surfaces. Its compact form makes it ideal for discreet accent lighting in cabinetry, shelving, or display applications.

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 240 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%, Clear 95%.

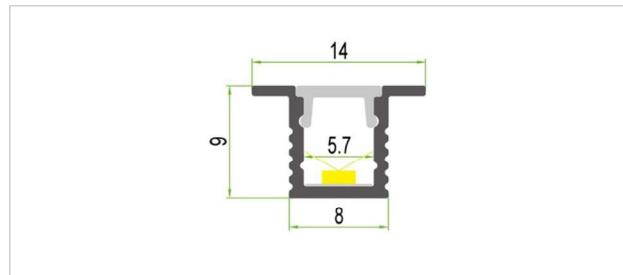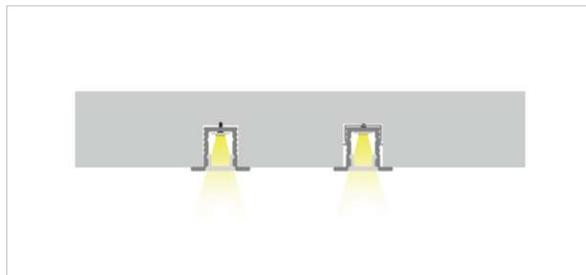

TECHNICAL INFORMATION

Product Code	NGA1409
Product Group	Aluminium Profile
Installation Type	Recessed
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal / Clear

Profile Type	Straight
Dimensions	W 14mm x H 9mm
Weight	0.0786 kg/m
Max Power	9.6W/m
Max Strip Width	5mm
Beam Angle	50°
IP Rating	IP20
Accessories	Plastic endcaps/ Plastic clips/ Metal clips/ Adjustable clips

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA