

# FLEXLINE RECESSED 2015

NGA2015



SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A recessed aluminium profile designed for flush integration into cabinetry, shelving, or wall surfaces. Its wider, deep-set structure delivers focused, direct illumination with minimal glare. Ideal for residential and commercial interiors requiring discreet, built-in lighting with added design flexibility.

## PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Milky 65–70%, Opal 75%, Frost 85–90%, Clear 95%.

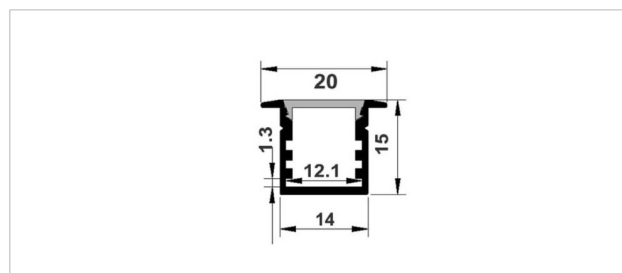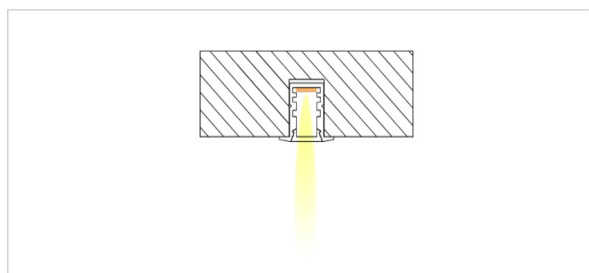

## TECHNICAL INFORMATION

Product Code	NGA2015
Product Group	Aluminium Profile
Installation Type	Recessed
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 20 x H 15mm
Weight	0.185 kg/m
Max Power	15W/m
Max Strip Width	10mm
Beam Angle	120°
IP Rating	IP20
Accessories	Plastic end caps/ Metal mounting clips

### UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: [info@nogreyarea.co.uk](mailto:info@nogreyarea.co.uk)

### MENA REGION HQ

T: +971 (0) 433 38300 | E: [info@nogreyarea.me](mailto:info@nogreyarea.me) | [www.no-grey-area.com](http://www.no-grey-area.com)

NGA