

# FLEXLINE RECESSED 2113

NGA2113



SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A recessed aluminium profile featuring an angled LED mounting surface for enhanced optical performance and thermal management. The tilted design reduces glare and visible dotting, while the integrated heat sink improves LED cooling and longevity. Ideal for task and accent lighting in residential and commercial interiors where discreet, high-performance illumination is required.

## PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Milky 65–70%, Opal 75%, Frost 85–90%, Clear 95%.

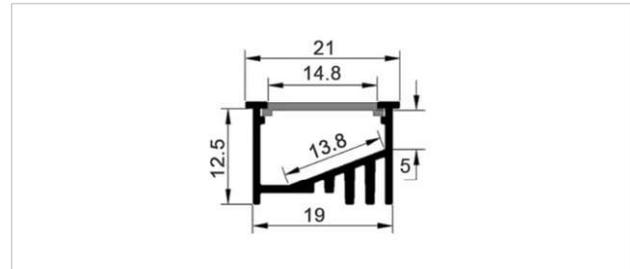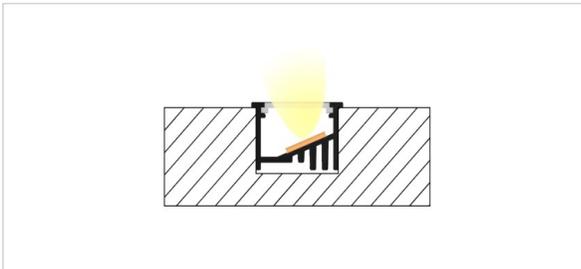

## TECHNICAL INFORMATION

Product Code	NGA2113
Product Group	Aluminium Profile
Installation Type	Recessed
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 21 x H 12.5mm
Weight	0.185 kg/m
Max Power	15W/m
Max Strip Width	13mm
Beam Angle	120°
IP Rating	IP20
Accessories	Plastic end caps/ Metal mounting clips

### UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

# NGA