

# FLEXLINE RECESSED 2319

NGA2319



SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A recessed aluminium profile featuring a 60° beam angle, designed for flush integration into plasterboard ceilings or walls. Its deep housing supports soft, uniform light output, making it ideal for ambient lighting in residential or commercial interiors.

## PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%, Milky 75%, Frost 89%, Clear 95%.

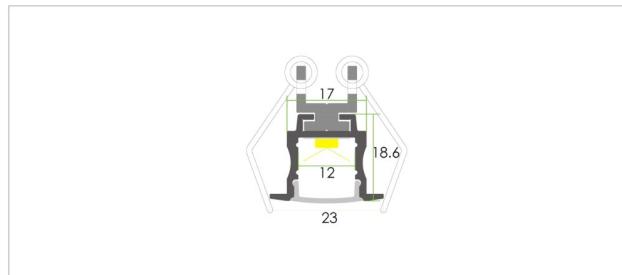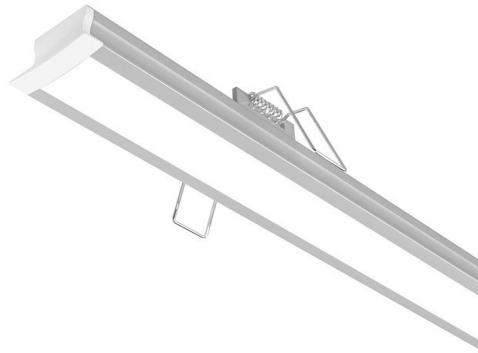

## TECHNICAL INFORMATION

Product Code	NGA2319
Product Group	Aluminium Profile
Installation Type	Recessed
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA / PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 23mm x H 18.6mm
Weight	0.268 kg/m
Max Power	19.2W/m
Max Strip Width	12mm
Beam Angle	60°
IP Rating	IP20
Accessories	Plastic endcaps with/ Spring clips

## UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

## MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA