

# FLEXLINE RECESSED 2507

NGA2507



SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A recessed aluminium profile designed for low-profile architectural lighting. Its slim design and curved diffuser allow for a clean, uniform wash of light with minimal glare and dotting. Ideal for subtle integration into ceilings or walls, it offers smooth, consistent light output across the surface.

## PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 240 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Milky 65–70%, Opal 75%, Frost 85–90%, Clear 95%.

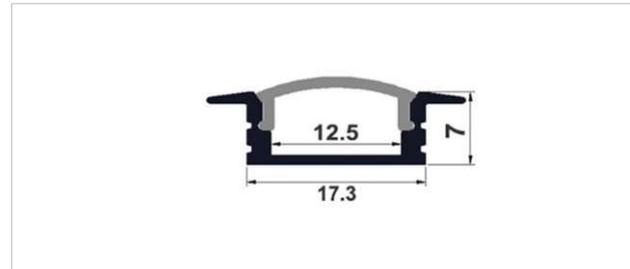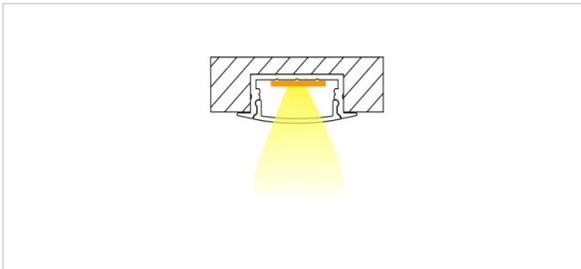

## TECHNICAL INFORMATION

Product Code	NGA2507
Product Group	Aluminium Profile
Installation Type	Recessed
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 17.3 x H 7mm
Weight	0.145 kg/m
Max Power	20W/m
Max Strip Width	12mm
Beam Angle	120°
IP Rating	IP20
Accessories	Plastic end caps/ Metal mounting clips

### UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

# NGA