

FLEXLINE RECESSED 2515

NGA2515



SPECIFICATION SHEET

PRODUCT DESCRIPTION

A recessed aluminium profile with a wide flange for secure mounting into ceilings or walls. The curved diffuser creates a focused light distribution, while the internal channel supports reliable LED strip installation. Ideal for general lighting where controlled output is required.

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Milky 65–70%, Opal 75%, Frost 85–90%, Clear 95%.

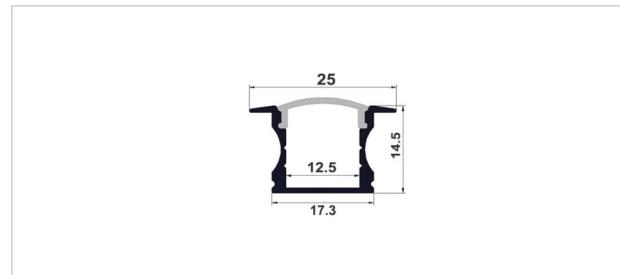

TECHNICAL INFORMATION

Product Code	NGA2515
Product Group	Aluminium Profile
Installation Type	Recessed
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 17.3 x H 14.5mm
Weight	0.185 kg/m
Max Power	20W/m
Max Strip Width	12mm
Beam Angle	120°
IP Rating	IP20
Accessories	Plastic end caps/ Metal mounting clips

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA