

FLEXLINE RECESSED 2610 IP65

NGA2610IP

SPECIFICATION SHEET



PRODUCT DESCRIPTION

A recessed aluminium profile with an IP65 rating, designed for environments requiring moisture and dust resistance. Its flanged edges allow for flush integration into joinery, cabinetry, or plasterboard surfaces, while the sealed diffuser provides uniform, direct illumination. Ideal for residential and commercial interiors, including damp or dust-prone areas such as bathrooms and kitchens, where discreet, durable lighting is needed.



PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 240 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Milky 65–70%, Opal 75%, Frost 85–90%, Clear 95%.

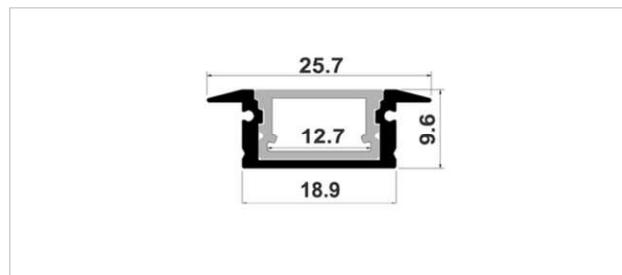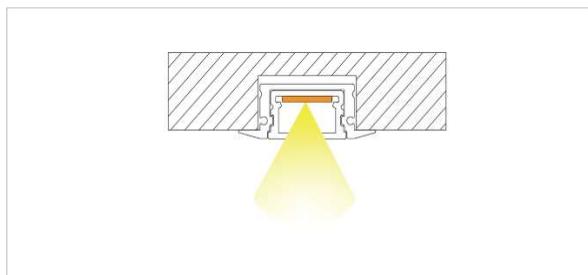

TECHNICAL INFORMATION

Product Code	NGA2610IP
Product Group	Aluminium Profile
Installation Type	Recessed
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 25.7 x H 9.6mm
Weight	0.21 kg/m
Max Power	10W/m
Max Strip Width	12mm
Beam Angle	120°
IP Rating	IP65
Accessories	Plastic end caps/ Metal mounting clips

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA