

FLEXLINE RECESSED 3813

NGA3813



SPECIFICATION SHEET

PRODUCT DESCRIPTION

A recessed aluminium profile featuring a 70° beam angle, designed for flush integration into plasterboard surfaces, with an angled internal geometry that directs light outward across walls or ceilings. Its discreet form makes it ideal for architectural accents and soft ambient lighting.

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 180 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%.

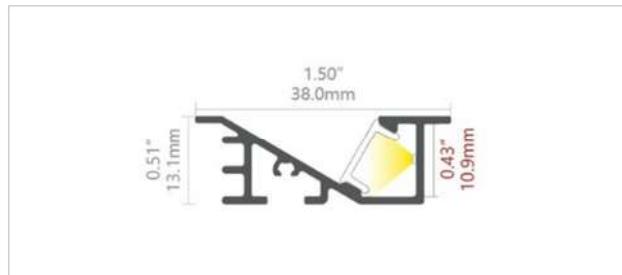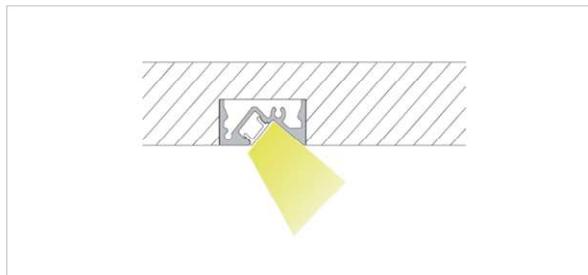

TECHNICAL INFORMATION

Product Code	NGA3813
Product Group	Aluminium Profile
Installation Type	Recessed
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA
Diffuser Options	Opal

Profile Type	Straight
Dimensions	W 38mm x H 13.1mm
Weight	0.2918 kg/m
Max Power	14.4W/m
Max Strip Width	11mm
Beam Angle	70°
IP Rating	IP20
Accessories	Aluminium endcaps/ Spring clips/ Joiner

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA