

# FLEXLINE RECESSED 6475

NGA6475




SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A recessed aluminium profile featuring a 90° beam angle and an integrated driver compartment for clean, streamlined ceiling installations. It can be assembled into custom shapes using 180°, 90°, or 120° joiners, making it ideal for architectural lighting applications requiring a minimalist, seamless finish.

## PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 60 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 2 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%, New Opal 74%.

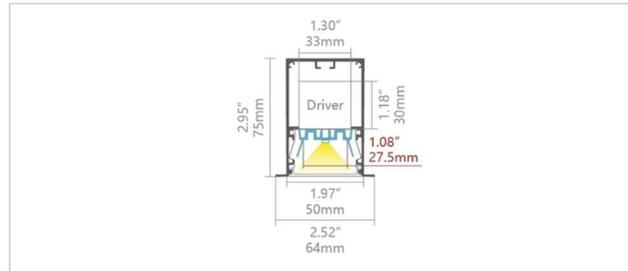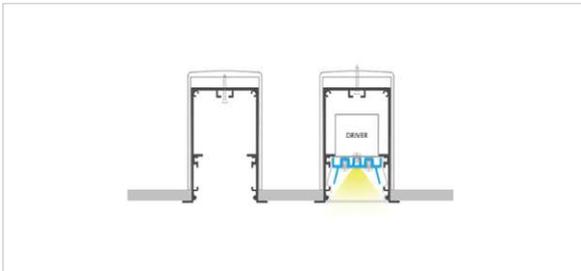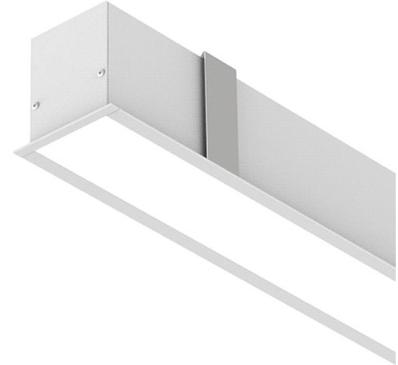

## TECHNICAL INFORMATION

Product Code	NGA6475
Product Group	Aluminium Profile
Installation Type	Recessed
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA
Diffuser Options	Opal / New Opal

Profile Type	Straight
Dimensions	W 64mm x H 75mm
Weight	1.748 kg/m
Max Power	57.6W/m
Max Strip Width	18mm
Beam Angle	90°
IP Rating	IP20
Accessories	Aluminium endcaps/ Metal clips/ Joiners

### UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

# NGA