

FLEXLINE RECESSED 7927

NGA7927



SPECIFICATION SHEET

PRODUCT DESCRIPTION

A recessed aluminium profile designed for skirting board and cove lighting applications. The curved housing softly distributes light across the mounting surface, creating an indirect accent effect. Its discreet design allows for seamless integration into plasterboard or timber structures, ideal for ambient or low-level lighting in corridors, cinemas, hotels, and residential interiors.

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Milky 65–70%, Opal 75%, Frost 85–90%, Clear 95%.

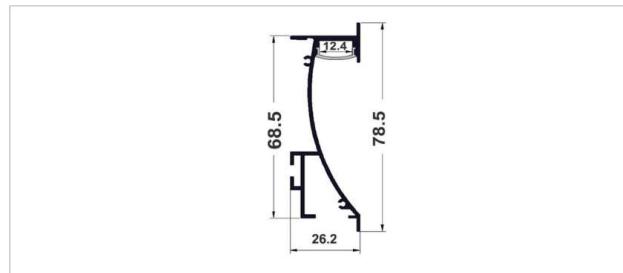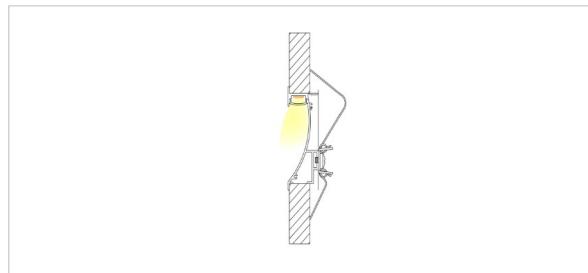

TECHNICAL INFORMATION

Product Code	NGA7927
Product Group	Aluminium Profile
Installation Type	Recessed
Light Distribution	Side-emitting / Step lighting
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 26.2 x H 78.5mm
Weight	0.728 kg/m
Max Power	20W/m
Max Strip Width	12mm
Beam Angle	120°
IP Rating	IP20
Accessories	Aluminium end caps/ Spring clips

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA