

# FLEXLINE SURFACE 1910 IP65

NGA1910IP



SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A surface-mounted aluminium profile designed for clean linear lighting across ceilings, walls, and joinery. Its compact structure and clip-in diffuser provide uniform illumination with a discreet surface finish. Ideal for residential and commercial interiors requiring versatile, low-profile lighting solutions.

## PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 240 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Milky 65–70%, Opal 75%, Frost 85–90%, Clear 95%.

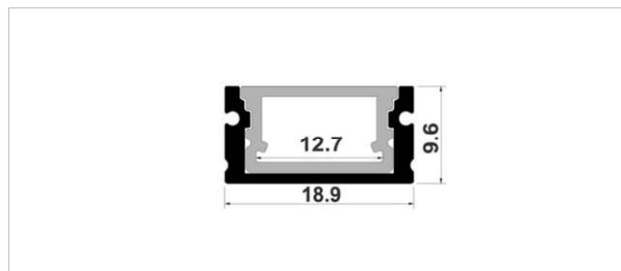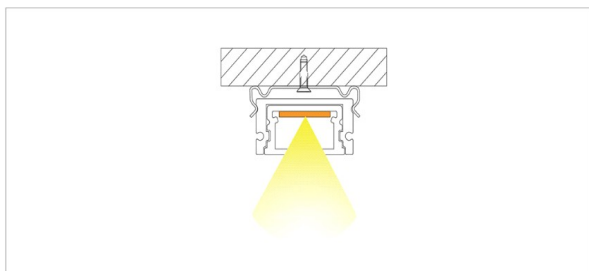

## TECHNICAL INFORMATION

Product Code	NGA1910IP
Product Group	Aluminium Profile
Installation Type	Surface
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 18.9 x H 9.6mm
Weight	0.187 kg/m
Max Power	10W/m
Max Strip Width	12mm
Beam Angle	120°
IP Rating	IP65
Accessories	Plastic end caps/ Metal mounting clips

### UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: [info@nogreyarea.co.uk](mailto:info@nogreyarea.co.uk)

### MENA REGION HQ

T: +971 (0) 433 38300 | E: [info@nogreyarea.me](mailto:info@nogreyarea.me) | [www.no-grey-area.com](http://www.no-grey-area.com)

# NGA