

FLEXLINE SURFACE 2007

NGA2007



SPECIFICATION SHEET

PRODUCT DESCRIPTION

A flexible surface-mounted aluminium profile designed to adapt to curved or irregular surfaces. Its bendable construction allows for creative installations in cabinetry, displays, or architectural features requiring non-linear lighting.

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 240 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%, Frost 89%.

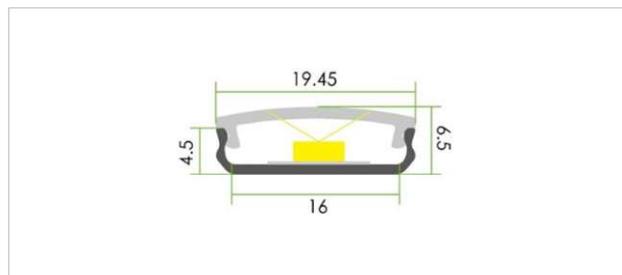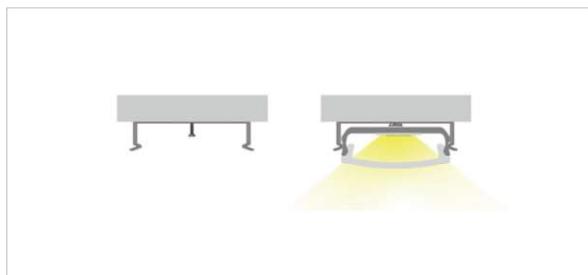

TECHNICAL INFORMATION

Product Code	NGA2007
Product Group	Aluminium Profile
Installation Type	Surface
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA
Diffuser Options	Opal / Frost

Profile Type	Bendable (min Radius \geq 75 mm)
Dimensions	W 19.45mm x H 6.5mm
Weight	0.089 kg/m
Max Power	14.4W/m
Max Strip Width	15mm
Beam Angle	135°
IP Rating	IP20
Accessories	Plastic endcaps/ Metal clips

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA