

# FLEXLINE SURFACE 2020 65°

NGA2020US




SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A surface-mounted or suspended aluminium profile with a controlled 65° beam angle and wide internal channel for clean, functional integration. Its square, U-shaped form supports continuous linear lighting with a streamlined architectural finish, ideal for commercial interiors, offices, and retail environments.

## PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%.

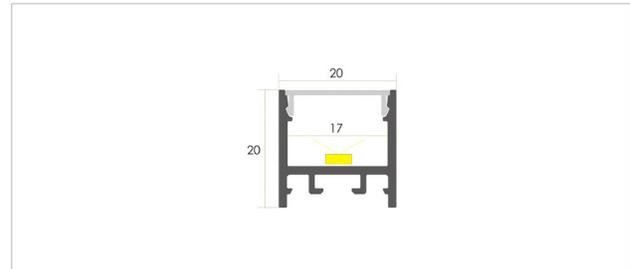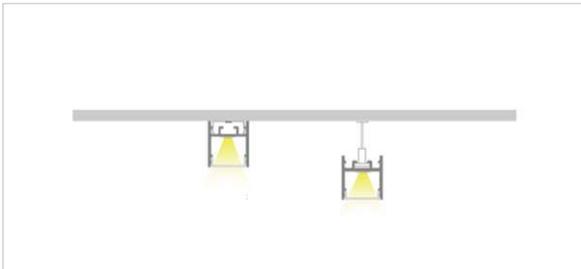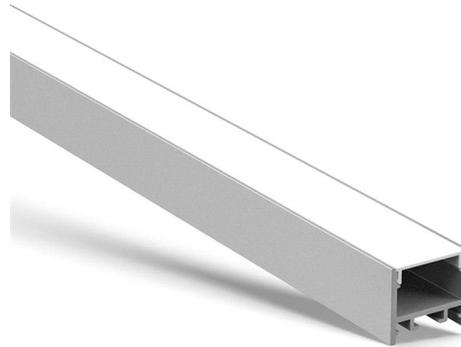

## TECHNICAL INFORMATION

Product Code	NGA2020US
Product Group	Aluminium Profile
Installation Type	Surface or Suspended
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA
Diffuser Options	Opal

Profile Type	Straight
Dimensions	W 20mm x H 20mm
Weight	0.272 kg/m
Max Power	19.2W/m
Max Strip Width	15mm
Beam Angle	65°
IP Rating	IP20
Accessories	Plastic endcaps/ Plastic clips/ Metal clips/ Adjustable clips

### UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

# NGA