

FLEXLINE SURFACE 2538

NGA2538




SPECIFICATION SHEET

PRODUCT DESCRIPTION

A surface-mounted or suspended aluminium profile designed for dual-directional lighting. With separate upward and downward channels, each featuring a 70° beam angle, it delivers balanced, functional illumination—ideal for modern office, retail, or hospitality environments.

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 60 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%.

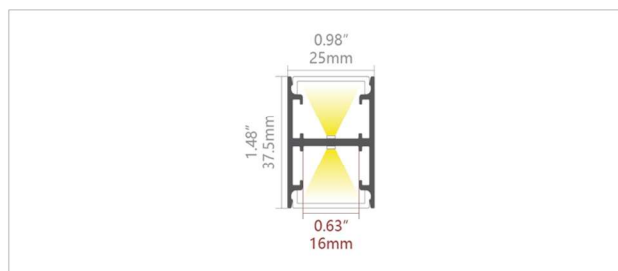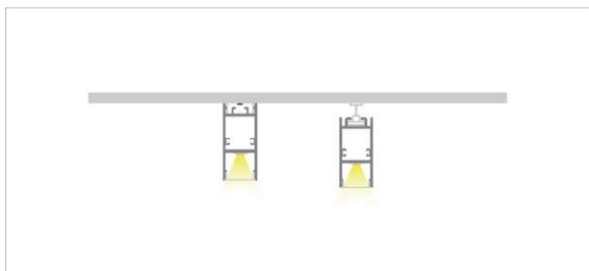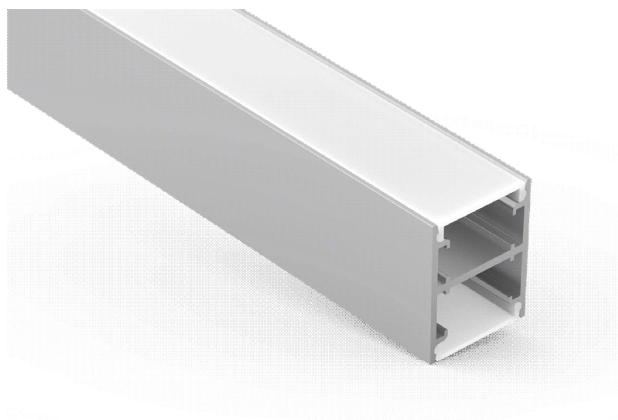

TECHNICAL INFORMATION

Product Code	NGA2538
Product Group	Aluminium Profile
Installation Type	Surface or Suspended
Light Distribution	Direct / Indirect
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA
Diffuser Options	Opal

Profile Type	Straight
Dimensions	W 25mm x H 37.5mm
Weight	0.756 kg/m
Max Power	19.2W/m
Max Strip Width	22mm
Beam Angle	70°
IP Rating	IP20
Accessories	Aluminium endcaps/ Suspension Kit/ Joiners

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA