

FLEXLINE SURFACE 2660

NGA2660



SPECIFICATION SHEET

PRODUCT DESCRIPTION

A surface-mounted aluminium profile designed for wall installations, providing downward illumination. Its clean, architectural form makes it ideal for creating linear wall accents in residential or commercial interiors.

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 240 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%, Milky 75%, Frost 89%, Clear 95%.

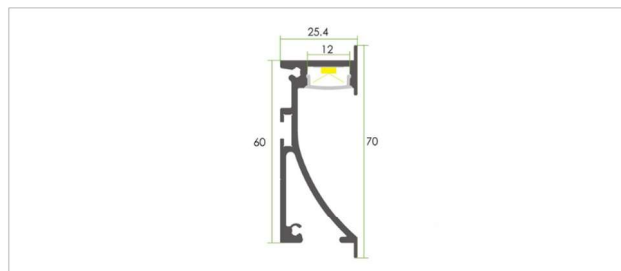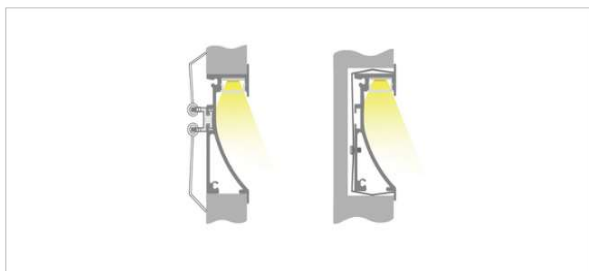

TECHNICAL INFORMATION

| | |
|--------------------|---------------------------------|
| Product Code | NGA2660 |
| Product Group | Aluminium Profile |
| Installation Type | Surface |
| Light Distribution | Direct |
| Profile Material | 6063-T5 Anodised Aluminium |
| Profile Finish | Silver / Black / White / Custom |
| Diffuser Material | PMMA / PC |
| Diffuser Options | Opal / Milky / Frost / Clear |

| | |
|-----------------|----------------------------------------------|
| Profile Type | Straight |
| Dimensions | W 25.4mm x H 60mm |
| Weight | 0.898 kg/m |
| Max Power | 19.2W/m |
| Max Strip Width | 12mm |
| Beam Angle | 100° |
| IP Rating | IP20 |
| Accessories | Aluminium endcaps/ Metal clips/ Spring clips |

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA