

FLEXLINE SURFACE 2840 30° IP67

NGA2840IP/30D




SPECIFICATION SHEET

PRODUCT DESCRIPTION

A surface-mounted or suspended aluminium profile with an IP67 rating, designed for environments requiring moisture and dust resistance. Featuring a 30° beam angle, it delivers focused, uniform illumination. The integrated honeycomb diffuser provides effective glare control, making it ideal for lighting corners in cabinetry, closets, or behind furniture, and for accentuating displayed objects such as decorative items, plants, or food products.

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 180 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Clear 95%.

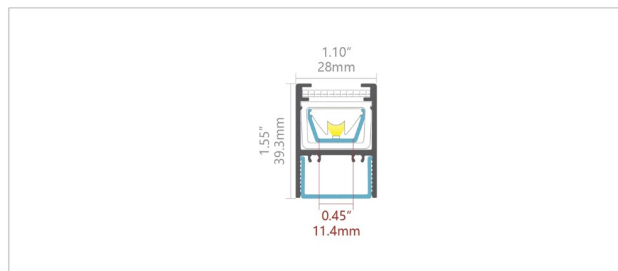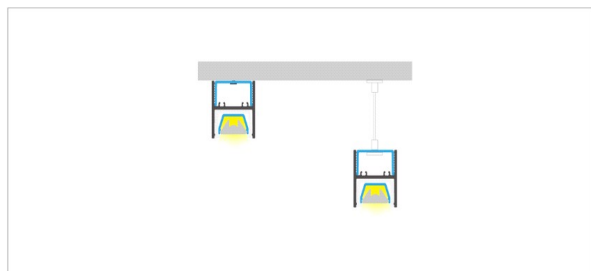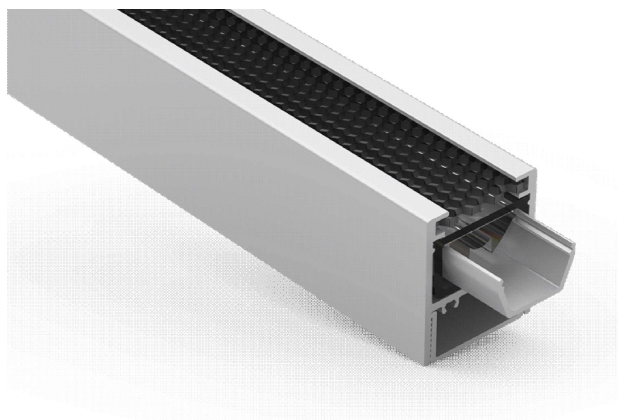

TECHNICAL INFORMATION

Product Code	NGA2840IP/30D
Product Group	Aluminium Profile
Installation Type	Surface or Suspended
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA
Diffuser Options	Clear

Profile Type	Straight
Dimensions	W 28mm x H 39.3mm
Weight	1.157 kg/m
Max Power	14.4W/m
Max Strip Width	12mm
Beam Angle	30°
IP Rating	IP67
Accessories	Aluminium endcaps/ Aluminium Mounting plate/ Suspension Kit

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA