

FLEXLINE SURFACE 3535

NGA3535



SPECIFICATION SHEET

PRODUCT DESCRIPTION

A surface-mounted or suspended aluminium profile designed for high-output linear lighting. The wide channel effectively dissipates heat from powerful LED strips, while the deep housing and internal structure help reduce glare and improve visual comfort. Ideal for commercial and architectural settings requiring efficient, uniform downlighting.

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 2 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Milky 65–70%, Opal 75%, Frost 85–90%, Clear 95%.

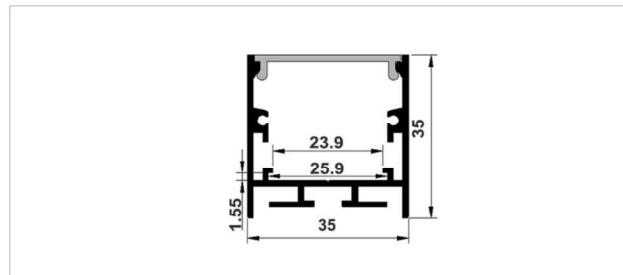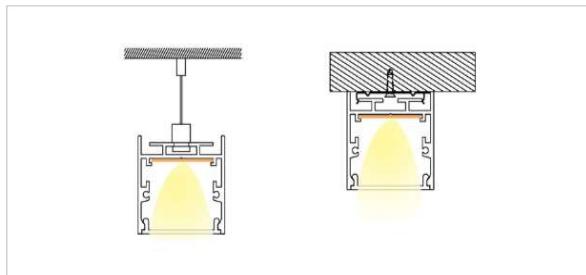

TECHNICAL INFORMATION

| | |
|--------------------|---------------------------------|
| Product Code | NGA3535 |
| Product Group | Aluminium Profile |
| Installation Type | Surface or Suspended |
| Light Distribution | Direct |
| Profile Material | 6063-T5 Anodised Aluminium |
| Profile Finish | Silver / Black / White / Custom |
| Diffuser Material | PC |
| Diffuser Options | Opal / Milky / Frost / Clear |

| | |
|-----------------|--|
| Profile Type | Straight |
| Dimensions | W 35 x H 35mm |
| Weight | 0.65 kg/m |
| Max Power | 30W/m |
| Max Strip Width | 23mm |
| Beam Angle | 120° |
| IP Rating | IP20 |
| Accessories | Aluminium end caps/ Metal mounting clips/ Suspension kit |

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA