

FLEXLINE SURFACE 3725

NGA3725



SPECIFICATION SHEET

PRODUCT DESCRIPTION

A surface-mounted aluminium profile featuring a 70° beam angle, designed for wall-washing applications. Its angled internal geometry directs light across vertical surfaces, making it ideal for highlighting architectural features or creating soft ambient effects.

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%, Milky 75%, Frost 89%, Clear 95%.

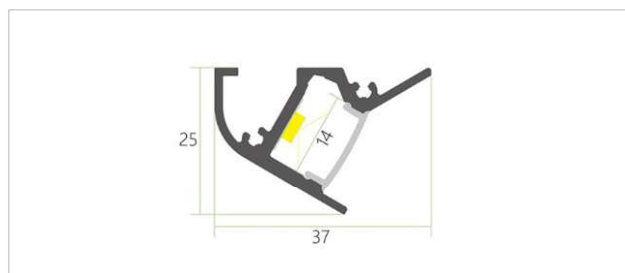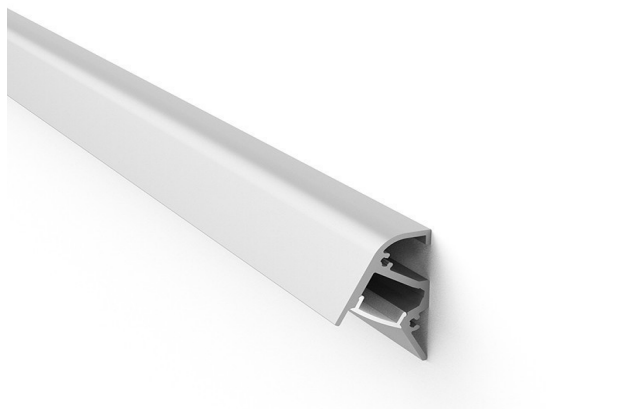

TECHNICAL INFORMATION

Product Code	NGA3725
Product Group	Aluminium Profile
Installation Type	Surface
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA / PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 37mm x H 25mm
Weight	0.438 kg/m
Max Power	19.2W/m
Max Strip Width	15mm
Beam Angle	70°
IP Rating	IP20
Accessories	Plastic endcaps/ Plastic clips/ Metal clips/ Adjustable clips

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA